
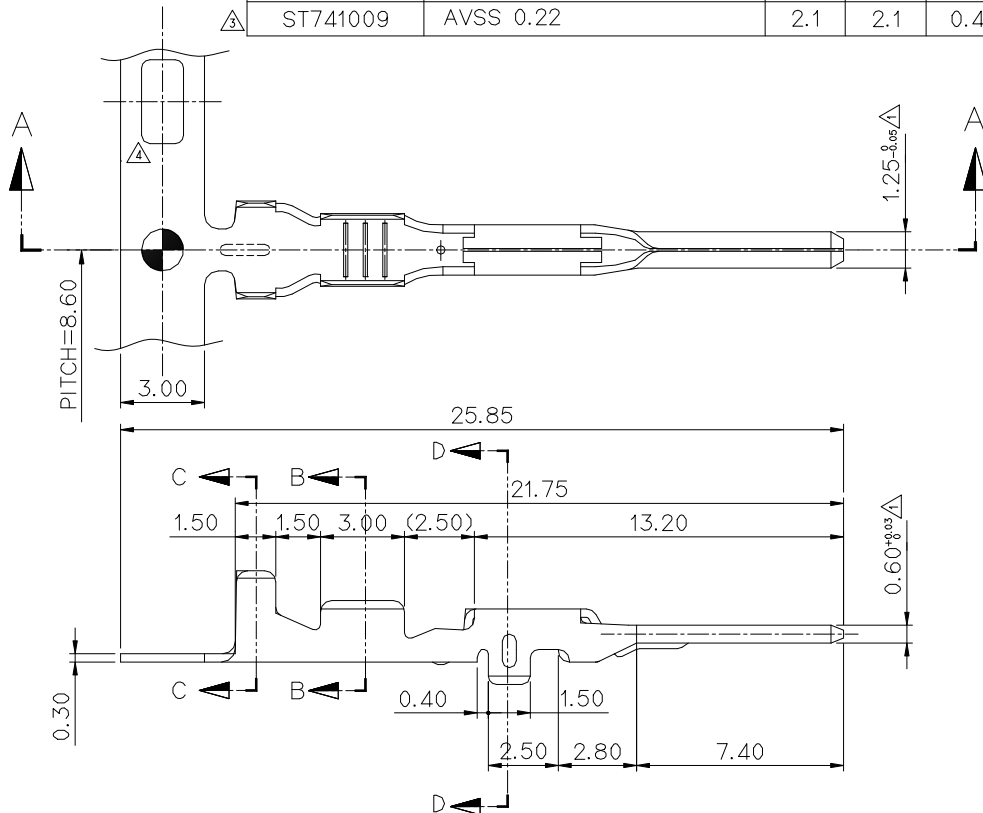
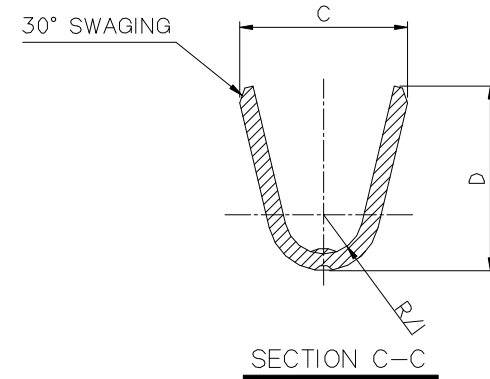



BARREL PART NO.	WIRE RANGE(mm ²)	WIRE BARREL			INSULATOR BARREL		
		A	B	R/W	C	D	R/I
ST740753	AVS,CAVS,CAVUS 0.3 - 0.5	2.5	2.4	0.6	3.0	3.3	0.7
ST741009	AVSS 0.22	2.1	2.1	0.4	3.0	3.3	0.7

GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
± 0.2	± 0.25	± 0.3	± 0.5	$\pm 30'$	0.1	

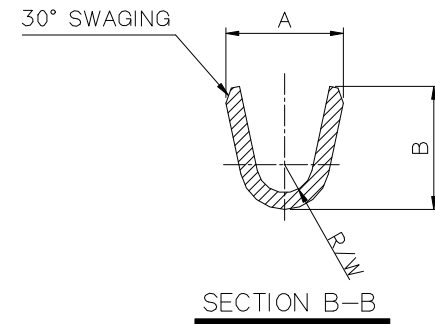

~S. ~!_J
1.^*!|5~7_ " ^- '%|^R'-|P FEMALE TERMINAL: ST730751

NOTE

1. APPLICABLE FEMALE TERMINAL :ST730751

ISSUE MARK

						MATERIAL BRASS		KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.		
						FINISH PRE-TIN				
④	ECO-1305-173 근거 도면 제작성	YM.K	CSH	HSB	13.06.04					
③	실계사양변경(060082) 근거 제작성 (사양 추가)	YSW	HSB	KKJ	06.03.14					
②	시방변경 "010142" 근거 도면 제작성	LSY	KO	④	01.09.15	WIRE RANGE SEE TABLE		CLASS		
①	~Z>^4"! e_-^/%5	SUK	KO	④	00.08.14	INSULATION SEE TABLE		TYPE		
LTR	REVISION RECORD			DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO. ST740753 ③ST741009
DR.	WK CHOI	98.12.01	CHK.	④	12.02			PART NAME		
CHK.	④	12.02	APP.	CHOI	12.02			050 MALE TERMINAL		