
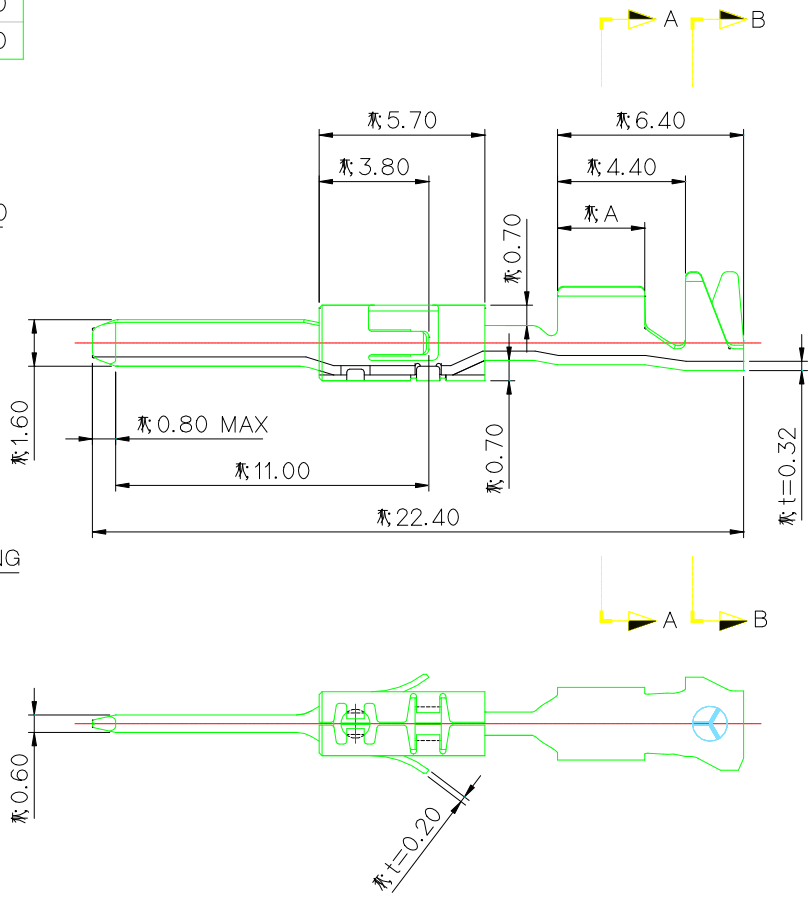
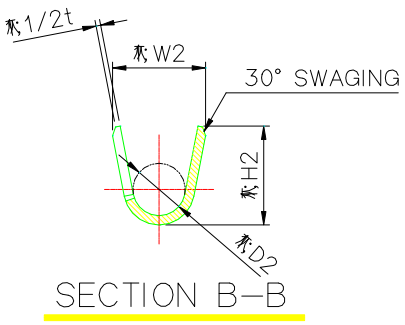
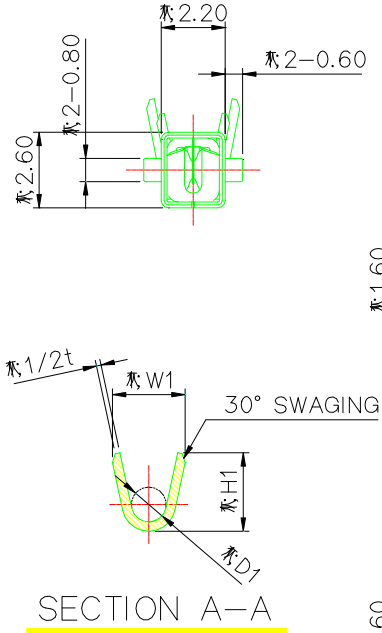


NO.	PART NO	BARREL	WIRE RANGE(mm ²)	INSULATION RANGE	WIRE BARREL			INSULATION BARREL			A
		PART NAME			W1	H1	D1	W2	H2	D2	
1	ST741347	150 MALE TML(S)	FLR 0.2 - 0.5	ø1.15 ~ ø1.6	2.1	2.1	0.8	2.9	2.9	1.4	2.5
2	ST741348	150 MALE TML(M)	FLR 0.5 - 1.0	ø1.4 ~ ø2.1	2.5	2.7	1.2	3.2	3.4	1.8	3.0
3	ST741349	150 MALE TML(L)	FLR 1.5	ø2.2 ~ ø2.4	2.8	3.0	1.4	3.5	3.9	1.9	3.0

GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	

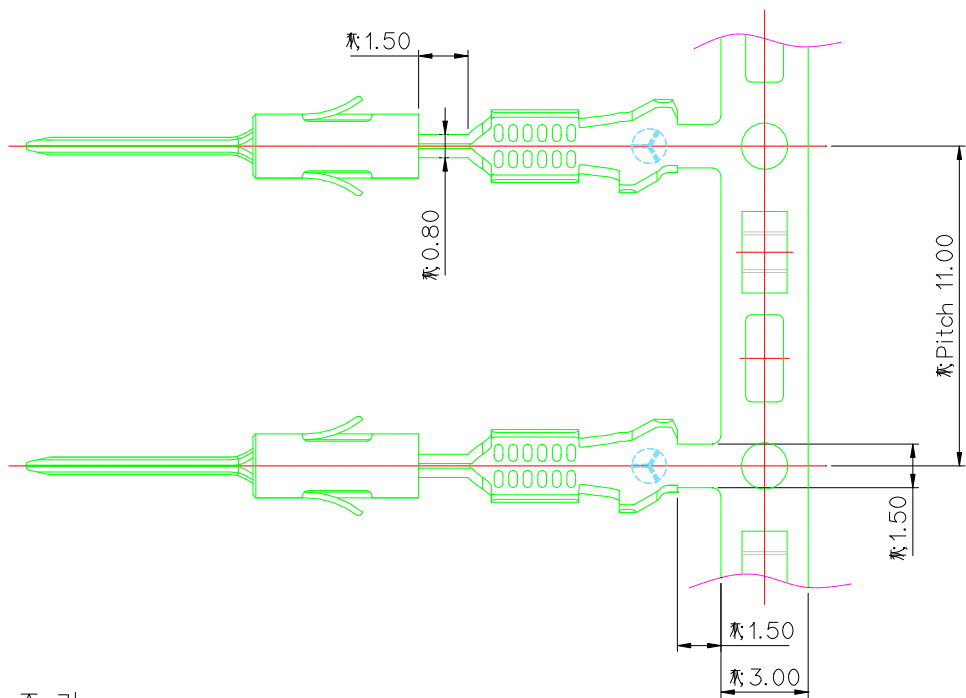


주 기

- 지시없는 R은 0.2, C는 0.1로 한다.
- 기능상 유해한 BURR 및 CRACK 등이 없을 것.
- 적용 REC TERMINAL : ST731379, 1380, 1381
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.2 RADIUS, CHAMFER 0.1.
- MUST BE FREE OF BURR, CRACK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE REC TERMINAL : ST731379, 1380, 1381
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

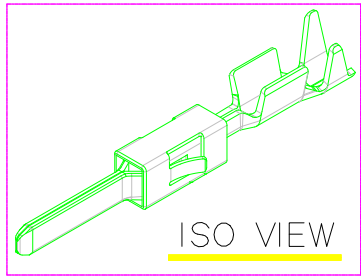

						MATERIAL Copper—Alloy/SUS	 KOREA ELECTRIC TERMINAL CO., LTD.			
						FINISH Pre-Tin				
						WIRE RANGE		CLASS 150		
						INSULATION		TYPE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1	PART NO. ST741347/348/349
DR.	KYJ 13.04.17		CHK.	KJS 13.04.17						
CHK.	HEM 13.04.17		APP.	HSH 13.04.17			PART NAME 150 MALE TML			

APPROVED

2015-06-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MARK

KIET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.