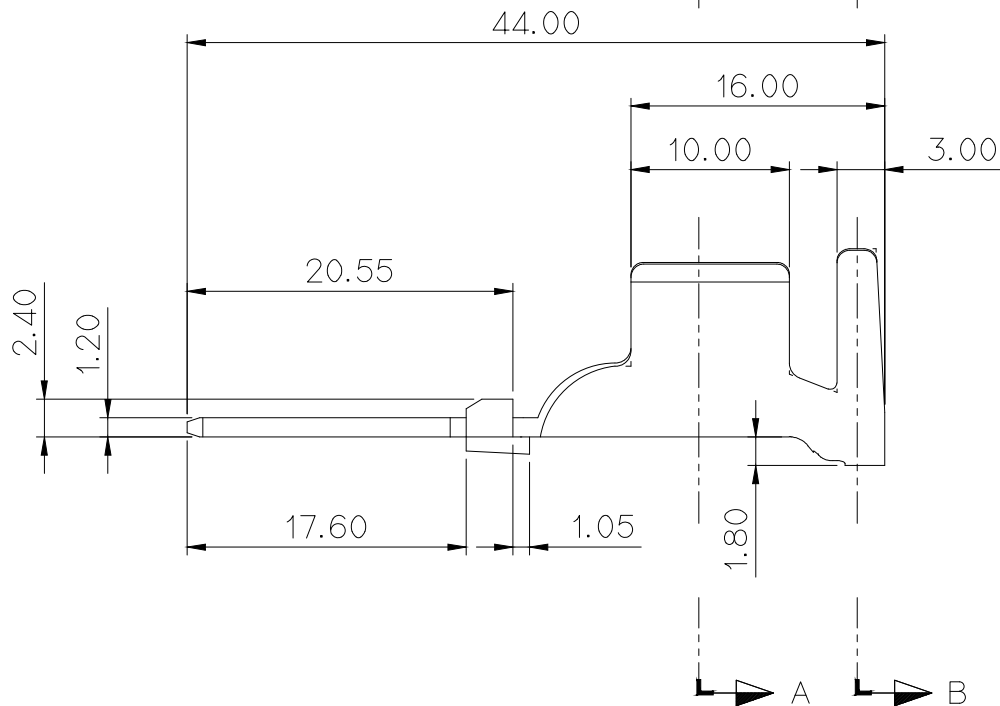

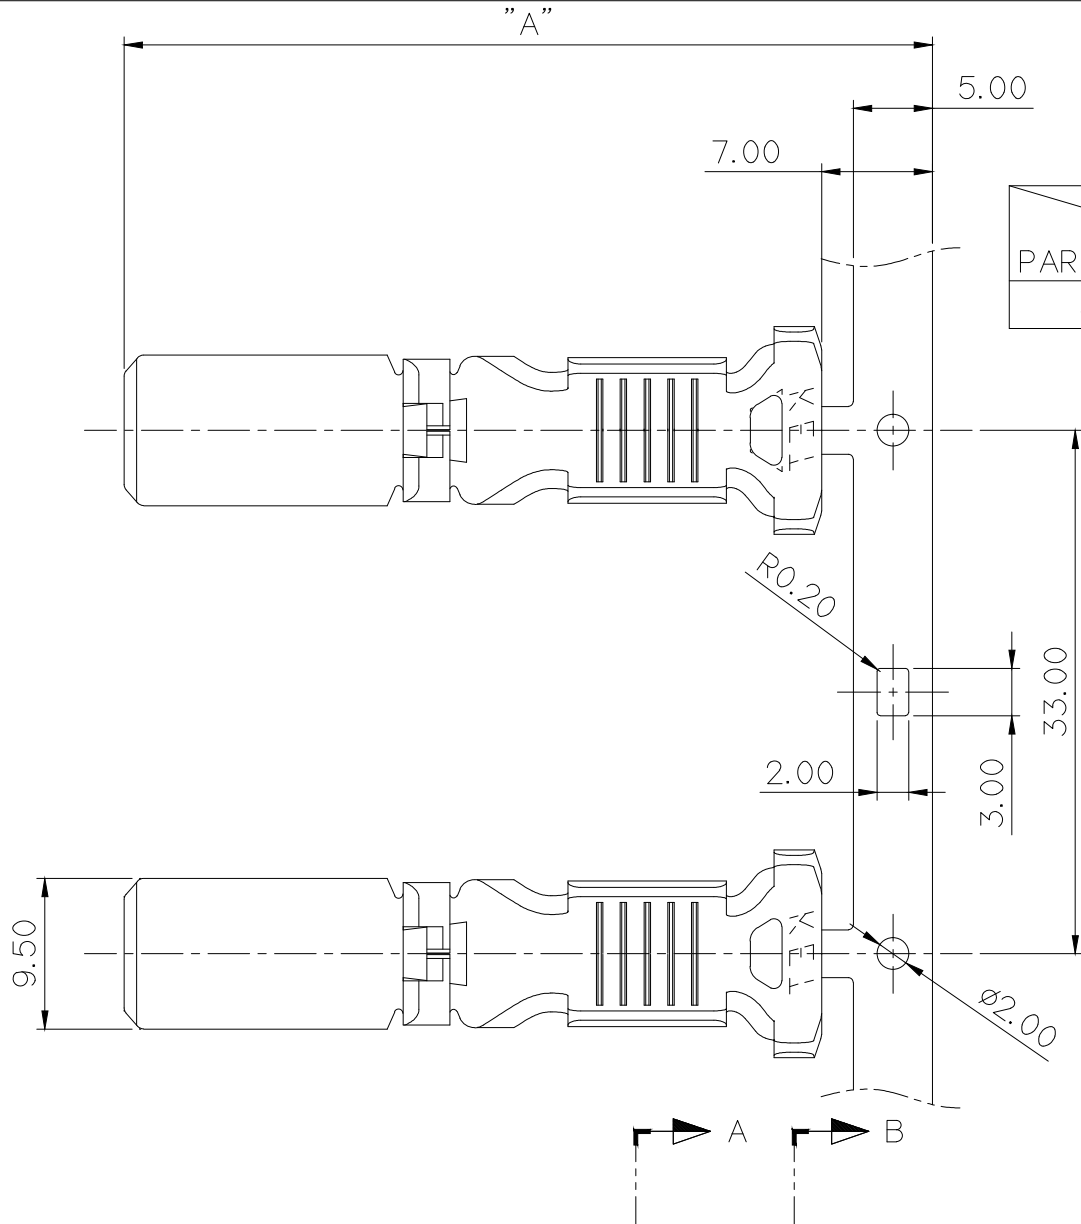
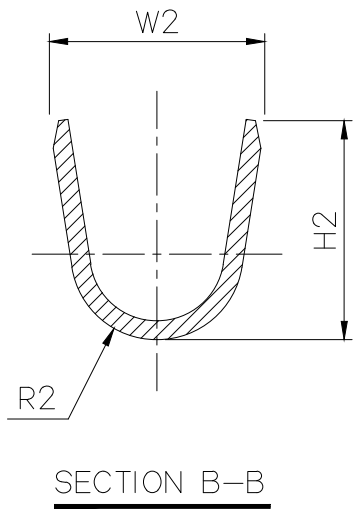
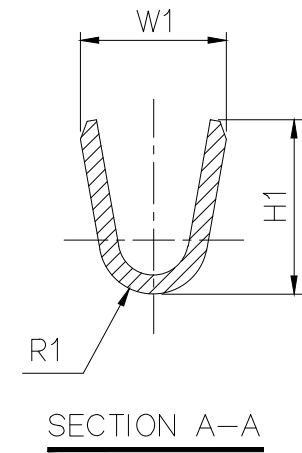


GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	

PART NO.	BARREL	WIRE RANGE (mm ²)	WIRE BARREL			INSULATION BARREL			FINISH
			W1	H1	R1	W2	H2	R2	
ST741353-S		AEXHSF 10-15	9.2	11.0	3.2	13.9	13.6	5.4	Ag 선도금

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE FEMALE TERMINAL : ST731392
- PLATING SPECIFICATION ("A")
 - GROUND : Ni 2.0~4.0um, Ag : 3.0~5.0um (Ag CONTENT : 99.70~99.90%)
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 CRACK 등이 없을 것.
- 적용 FEMALE TERMINAL : ST731392
- 도금 사양 ("A")
 - 하지 : Ni 2.0~4.0um, Ag : 3.0~5.0um (Ag 함유량 : 99.70~99.90%)
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2016-03-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 2

ISSUE MARK

						MATERIAL Copper—Alloy		 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH SEE TABLE		
						WIRE RANGE SEE TABLE		
						INSULATION SEE TABLE		
LTR	REVISION RECORD	DR. CHK.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. ST741353
DR.	H.S.R 14.07.24	CHK.				PART NAME		
CHK.	C.K.Y 14.07.24	APP. L.S.J 14.07.24				375 WP MALE TERMINAL		