




GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	

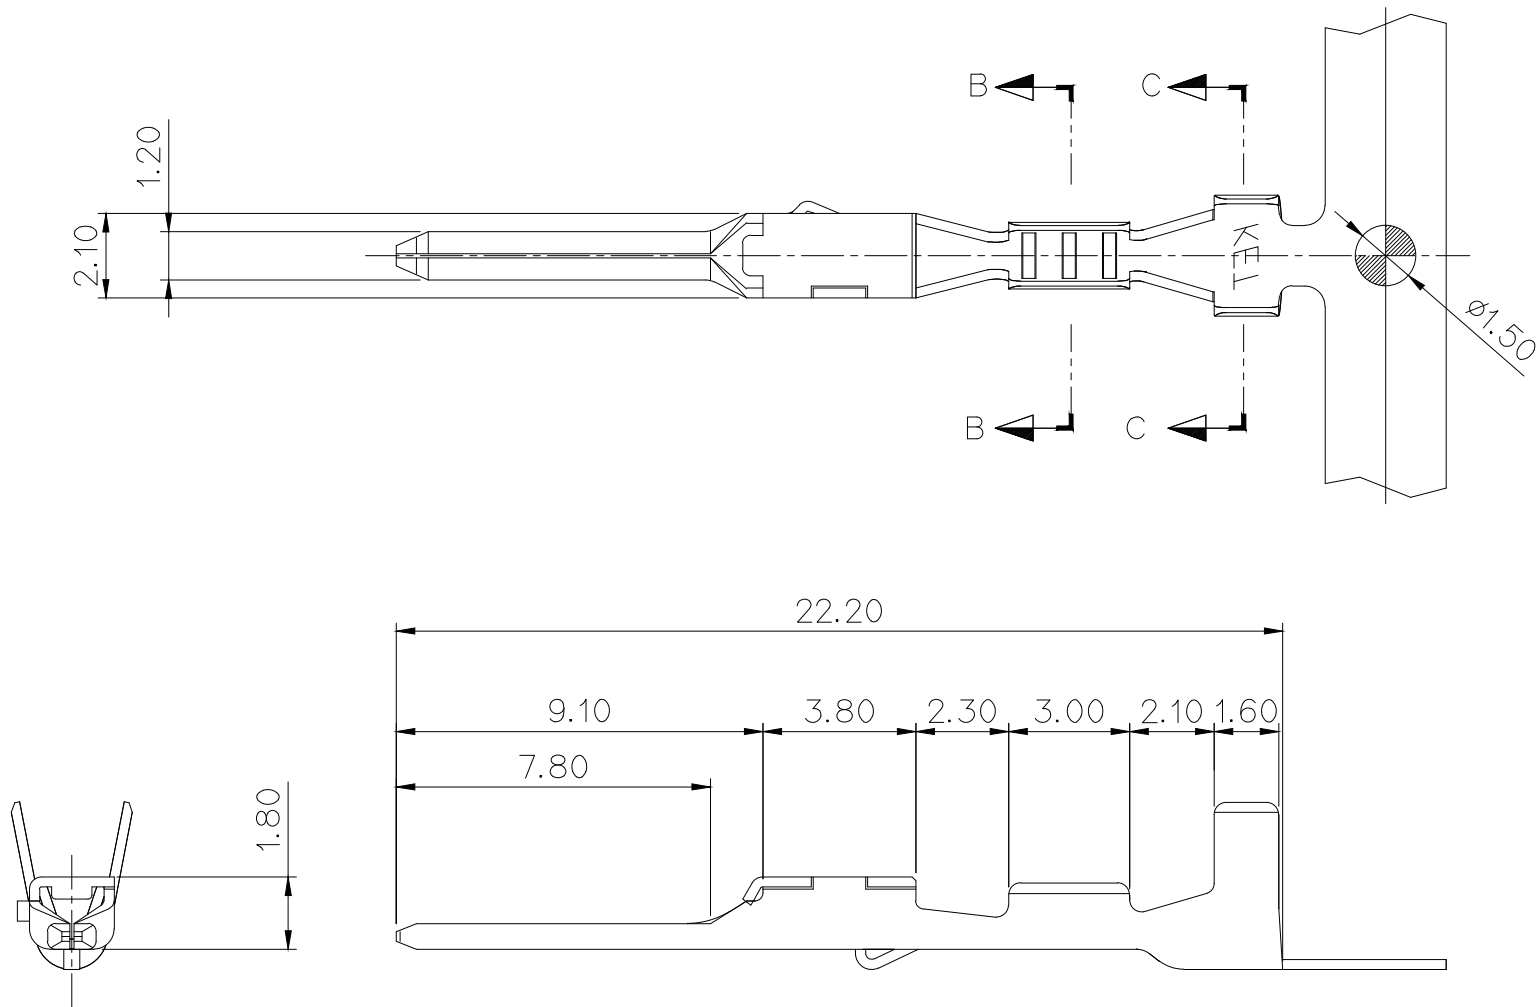

SECTION B-B

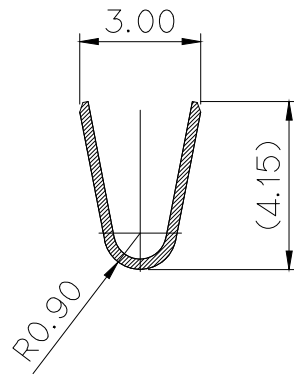

SECTION C-C

NOTE

- 기능상 유해한 흠,변형 및 BURR가 없을것
- 적용 CONN'T : 050 CONNECTOR
- 적용 상대 REC. TERMINAL : ST731395
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 ROHS 법규에서 지정한 최대허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE CONN'T : 050 CONNECTOR
- APPLICABLE REC. TERMINAL : ST731395
- 6 HAZARDOUS SUBSTANCE IN PARTS (LEAD,MERCURY,CADMIUM HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMIUM PERMISSIBLE CONCENTRATION PRESCRIBED BY THE EU ELV DIRECTIVE & THE ROHS REGULATION..

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL	BRASS	 KOREA ELECTRIC TERMINAL CO., LTD.			
					FINISH	PRE-TIN				
					WIRE RANGE	26-24				
					INSULATION	1.32~1.45				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO.	ST741357-3SS
DR.	SMG '14.11.27		CHK.		PSH '14.11.27		PART NAME NEW 050 MALE TERMINAL (SS)			
CHK.	KSH '14.11.27		APP.		BUC '14.11.27					