CUSTOMER DRAWING

PART NO. ⑧407,408,418,⑨ST741285,286,287,373,398



ISO-VIEW
(S= 1/1)

GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30′	0.1	

주 기

1. 지시없는 C,R=0.30으로 한다.
2. 기능상 유해한 흠,변형 및 BURR가 없을 것.
3. ②적용 상대 FEMALE TERMINAL : ST731279-3,731280-3,731281-3, ⑦⑧ST731432-3,⑦⑧731480-3,⑦⑧731481-3,⑨731494-3
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
3. ②APPLICABLE FEMALE TERMINAL : ST731279-3,731280-3,731281-3, ⑦⑧ST731432-3,⑦⑧731480-3,⑦⑧731481-3,⑨731494-3
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

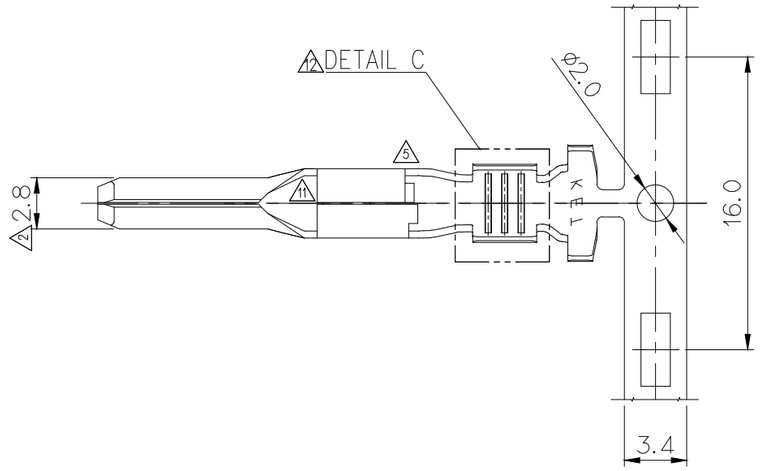

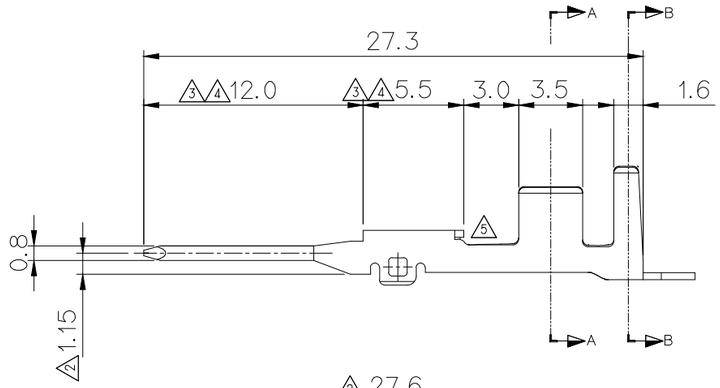





⑫DETAIL C

ST741407-3
ST741408-3
ST741418-3

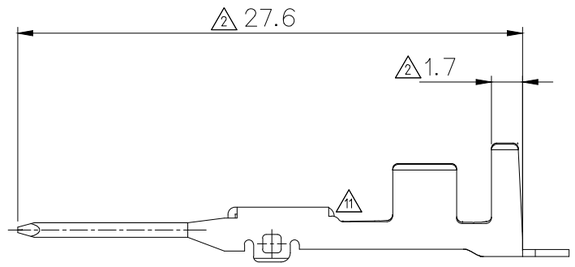

② ST741373-3



SECTION A-A

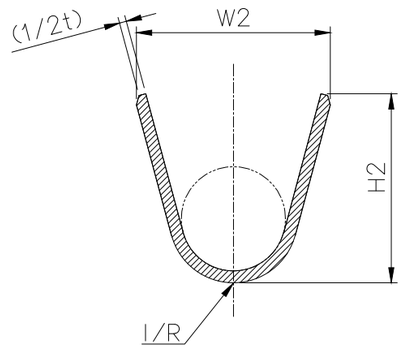

SECTION B-B

BARREL / PART NO.	WIRE RANGE	WIRE BARREL			INSULATION BARREL		
		W1	H1	W/R	W2	H2	I/R
⑥ST741398-3	CIVUS 0.35, CIVUS 0.5	2.4	2.35	0.8	2.6	2.6	0.9
ST741285-3	AVSS 0.3 – 0.5	2.9	2.6	0.9	3.8	3.8	1.4
⑦⑧ST741408-3	⑧FLALUY 0.75	⑨3.12	⑨2.88	0.9	3.8	3.8	1.4
⑦ST741407-3	⑦⑨FLALUY1.25	3.0	3.5	1.2	5.0	5.0	2.0
ST741286-3	AVSS 0.85 – 1.25 ⑩CIVUS 0.35+0.35						
⑨ST741418-3	FLALRY2.0	3.1	3.85	1.2	5.0	5.0	2.0
ST741287-3	AVSS 2.0, AVS 3.0	4.4	4.6	1.5	6.5	6.1	2.1
②ST741373-3	FLR2X-B 4.0	5.0	5.0	1.8	6.7	(6.5)	2.1

LTR	REVISION RECORD	DR. / CHK.	APP.	DATE
⑫	ECO-1909-108 근거 도면 수정 알루미늄 세레이션 형상 CU도면 추가	JKH / HJE	CKY	19.09.23
⑪	ECO-1904-110 근거 도면 작성	PMH / HJE	CKY	19.04.05
⑩	ECO-1806-369 근거 도면 작성 (CIVUS 0.35+0.35 전선 사양 추가)	LSY	SUK	18.06.26
⑨	ECO-1805-109 근거 도면 작성 AI전선전용 Modify 추가개발	PMH / LSY	SUK	18.06.18
⑧	ECO-1801-479 근거 도면 작성 AI전선전용 Modify 추가개발	HJE / LSY	SUK	18.02.08
⑦	ECO-1712-053 근거 도면 작성 AI전선전용 Modify 개발	HJE / WSW	CMS	05.DEC.17
⑥	ECO-1708-164 근거 도면 변경	HJE / CMS	LJE	10.AUG.17
⑤	ECO-1704-130 근거 도면 변경 (터미널 Box부 후면 형상 변경)	LND / NKT	CJH	10.APR.17
④	ECO-1703-221 근거 도면 변경 (터미널 Box부 치수 변경)	KJS / KMH	LSY	16.MAR.17
③	ECO-1612-343 근거 도면 변경 (터미널 Box부 형상 변경)	YSS / KMH	LSY	20.DEC.'16
②	ECO-1509-144 근거 도면 변경	JMS / LJE	BIN	10.SEP.'15
①	REVISED(R0_3S10107에의한 수정)	KHS / LDG	HSH	14.OCT.'10

DR. LKM 2010.02.17 CHK.

CHK. LEE, D.G 2010.02.17 APP. HEO, S.H 2010.02.17

APPROVED
2019-11-06
KOREA ELECTRIC TERMINAL CO., LTD.
Korea Electric Terminal Co., LTD.

ISSUE MARK

MATERIAL	BRASS	KET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	PRE-TIN		
WIRE RANGE	SEE TABLE	CLASS	280
INSULATION	SEE TABLE	TYPE	
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	3/1
PART NO.	⑥⑦407,⑦408,⑨418,⑥②ST741285,286,287,373,398		
PART NAME	280(110) MALE TERMINAL		

(DIMENSIONS IN MM)