

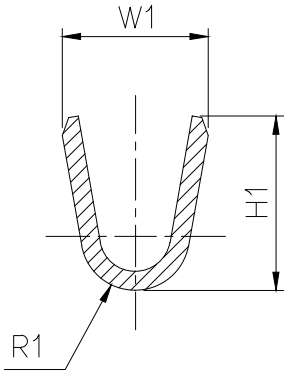



PART NO.	BARREL	WIRE RANGE(mm ²)	WIRE BARREL			INSULATION BARREL			FINISH
			W1	H1	R1	W2	H2	R2	
ST741395-3	△AEXF,AEXHSF	10-15	9.2	11.0	3.2	12.6	13.2	4.9	PRE-TIN

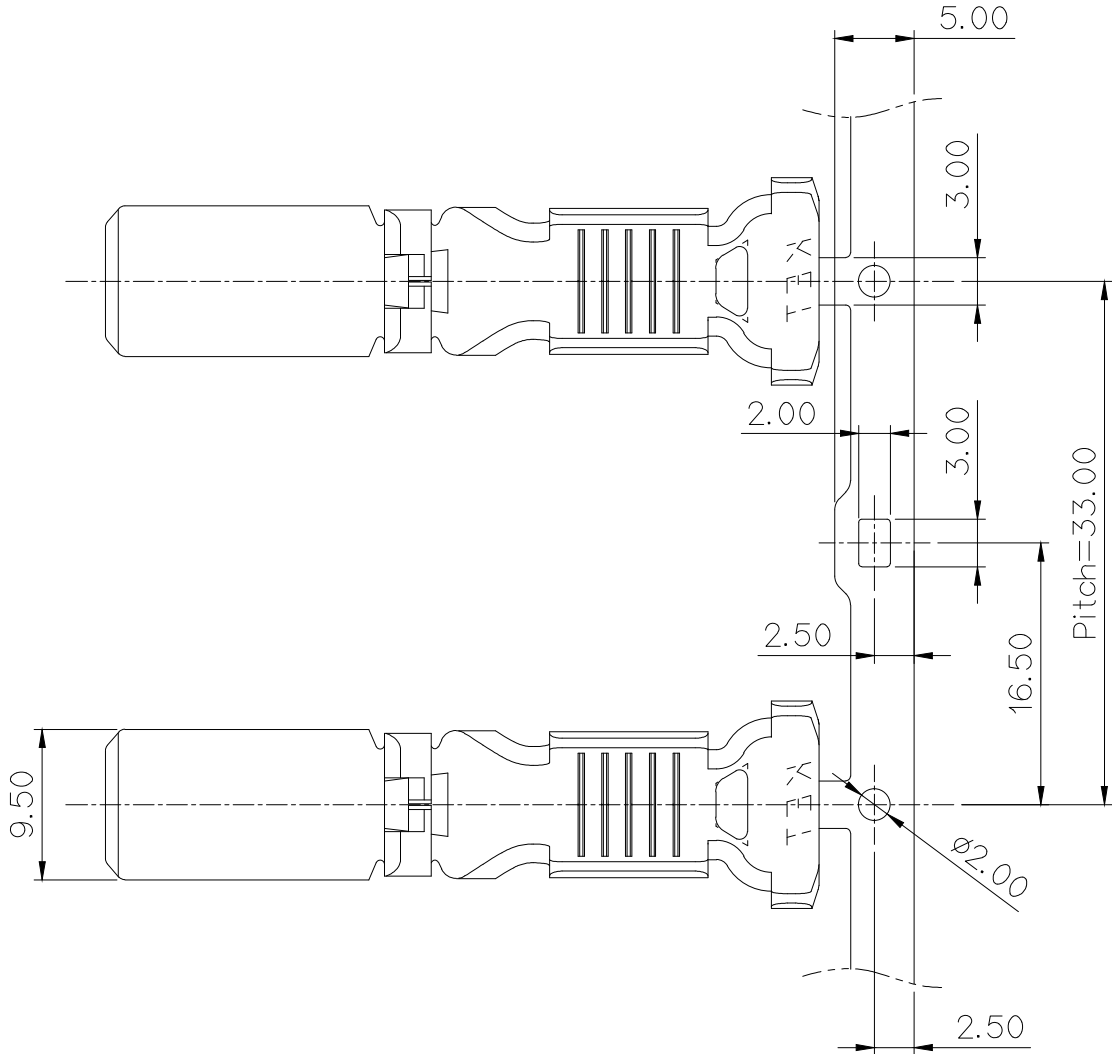

SECTION A-A

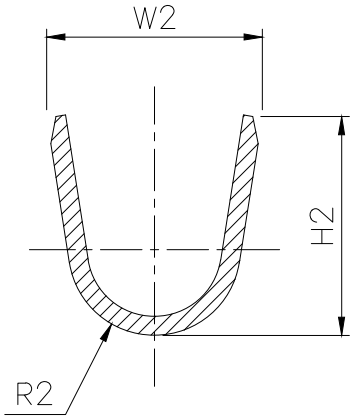

SECTION B-B

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE FEMALE TERMINAL : ST731452-3
- PLATING SPECIFICATION : PRE-TIN (Sn 0.8-1.8um)
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 CRACK 등이 없을 것.
- 적용 FEMALE TERMINAL : ST731452-3
- 도금 사양 : PRE-TIN (Sn 0.8-1.8um)
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL		Copper-Alloy	 KOREA ELECTRIC TERMINAL CO., LTD.			
						FINISH		SEE TABLE				
						WIRE RANGE		SEE TABLE		CLASS	375	
						INSULATION		SEE TABLE		TYPE	비방수	
	ECO-1702-317 근거 도면 재작성 전선사양 추가	HJE		WSW	'17.02.20	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	2/1	PART NO.	ST741395-3
LTR	REVISION RECORD	DR.	CHK.	CHK.	APP.	DATE	PART NAME					
DR.	HJE 17.01.04	CHK.					375 비방수 MALE TERMINAL					
CHK.	WSW 17.01.04	APP. BIN 17.01.04										