
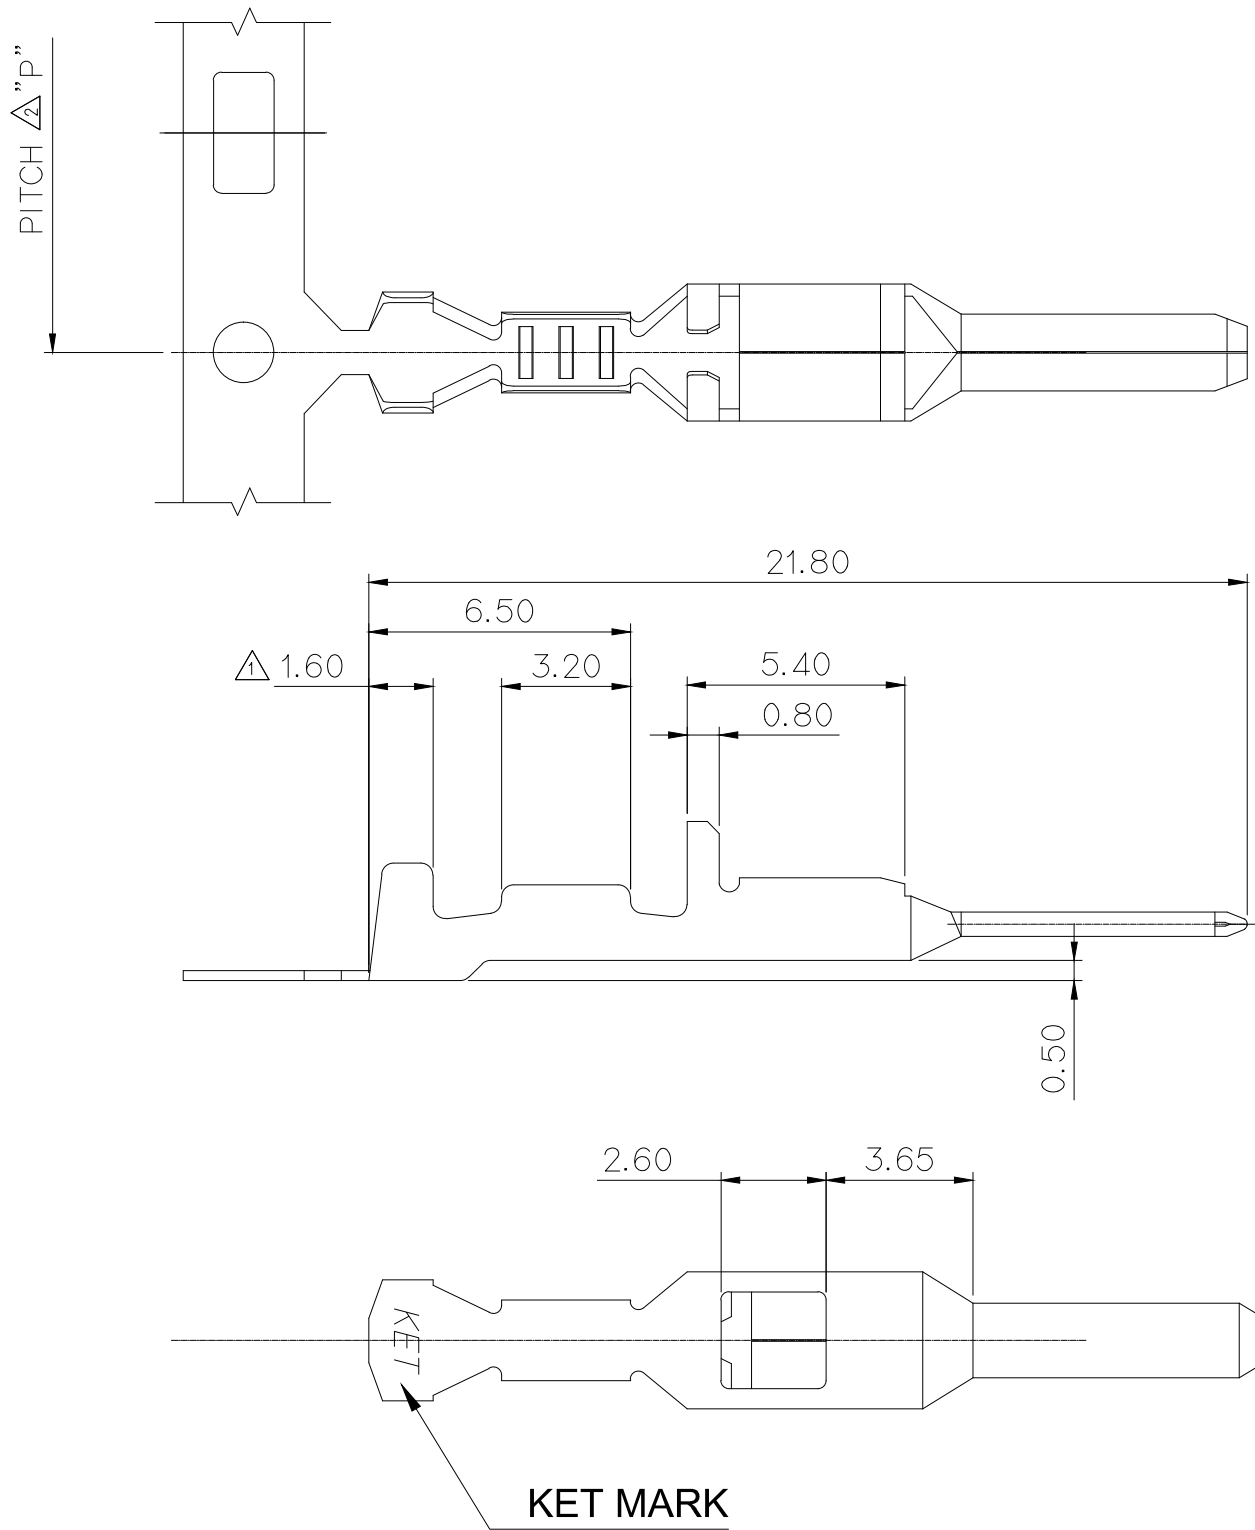


WIRE BARREL
(SCALE 10/1)

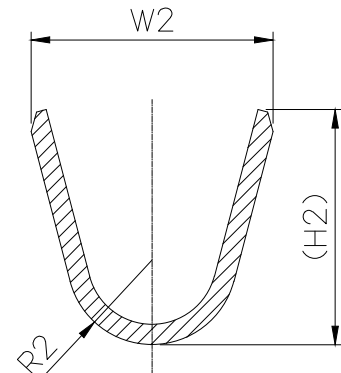

INSUL. BARREL
(SCALE 10/1)

GENERAL TOLERANCE (TERMINAL)

USED ON

5 MAX	10 MAX	20 MAX	45 MAX	45 VR	()
±0.2	±0.25	±0.3	±0.35	±0.5	±1.0

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE CONN'T: 070 SERIES CONNECTOR
- APPLICABLE FEMALE TERMINAL : ST731433,731434
- 6 HAZARDOUS SUBSTANCE IN PARTS (LEAD,MERCURY,CADMIUM HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED BY THE EU ELV DIRECTIVE & THE ROHS REGULATION..

NOTE

- 기능상 유해한 흠,변형 및 BURR가 없을 것.
- 적용 CONN'T: 070 SERIES CONNECTOR
- 적용 상대 FEMALE TERMINAL : ST731433,731434
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 ROHS 법규에서 지정한 최대허용 농도를 초과해서는 안된다.

NO.	PART NO.	W1	(H1)	R1	W2	(H2)	R2	△ P	WIRE RANGE(mmφ)	REMARK<외경>
1	741436-3S	2.00	1.80	0.65	3.00	2.95	1.05	10.60	UL1569 0.22~0.34	φ1.45 ~ φ1.60
2	741436-3M	2.40	2.40	0.85	3.80	3.80	1.50	10.60	UL1569 0.53~0.86	φ1.79 ~ φ2.05
△ 3	741436-3L	3.75	3.55	1.20	6.40	5.05	2.05	14.00	UL1015 1.25~2.08	φ3.10 ~ φ3.50
△ 4	741436-3DW	4.50	3.30	1.30	7.40	5.00	1.80	15.00	UL1015 0.53*2,0.86*2	φ2.52*2 ~ φ2.76*2

						MATERIAL		BRASS	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		PRE-TIN		
						WIRE RANGE		CLASS		070
						INSULATION		TYPE		
	ECO-1611-418 근거 수정		PSH	KSH	BUC	'16.11.25				
	ECO-1605-507 근거 수정		PSH	KSH	BUC	'16.05.04				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1	PART NO. ST741436
DR. PSH '16.05.10			CHK. KSH		'16.05.10		PART NAME			
CHK.			APP. BUC		'16.05.10		NEW 070 MALE TERMINAL B			

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK