

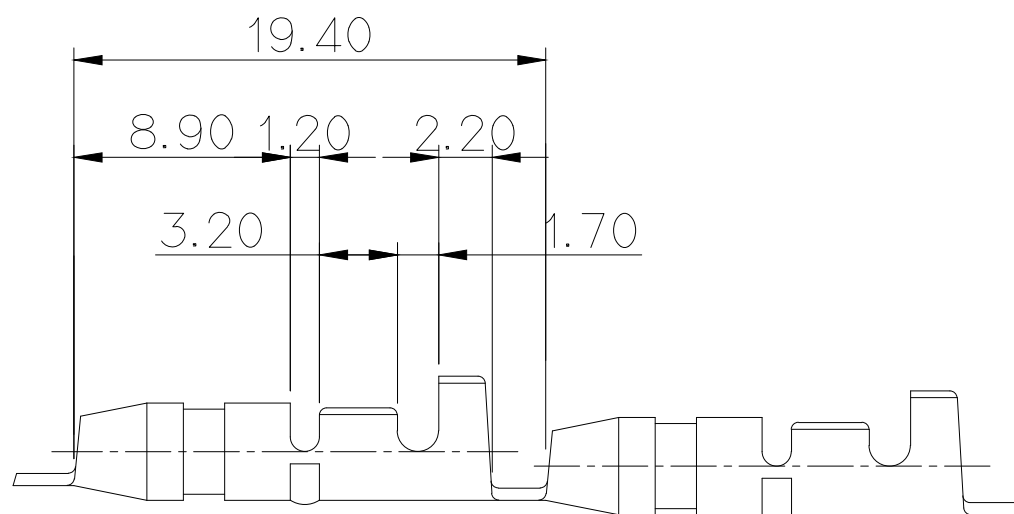


GENERAL TOLERANCE (TERMINAL)						USED ON
10MAX	50MAX	100MAX	250MAX	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.5	±30'	0.1	


NOTE

1. MUST BE FREE OF BURR, DEFORM AND IMPERFECTION
THAT AFFECT FUNCTION.

2. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

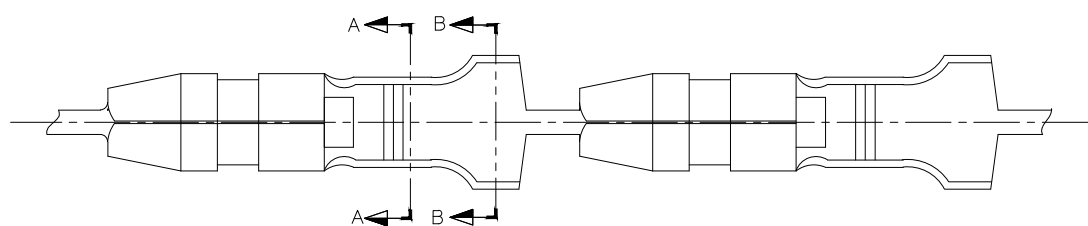

SEC' A-A



SEC' B-B

No	FINISH
1	BRASS
2	BRASS/TIN
3	PRE-TIN

주 기





1. 기능상 유해한 힘, 변형 및 BURR 등이 없을 것
2. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

APPROVED

2016-03-09

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	BRASS 0.5t	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE	AWG 18—14	
△2	설계사양변경(S110128)근거 도면 재작성			'11.04.28	INSULATION		CLASS
△1	시방변경서(S080147)근거 수정			08.06.24	TOLERANCE EXCEPT AS NOTED		TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE	PART NO.
DR.		'79.02.08	CHK.			2/1	ST750036
CHK.	KIM	'79.03.03	APP. 			PART NAME	
							ø3.96 PIN TERMINAL