
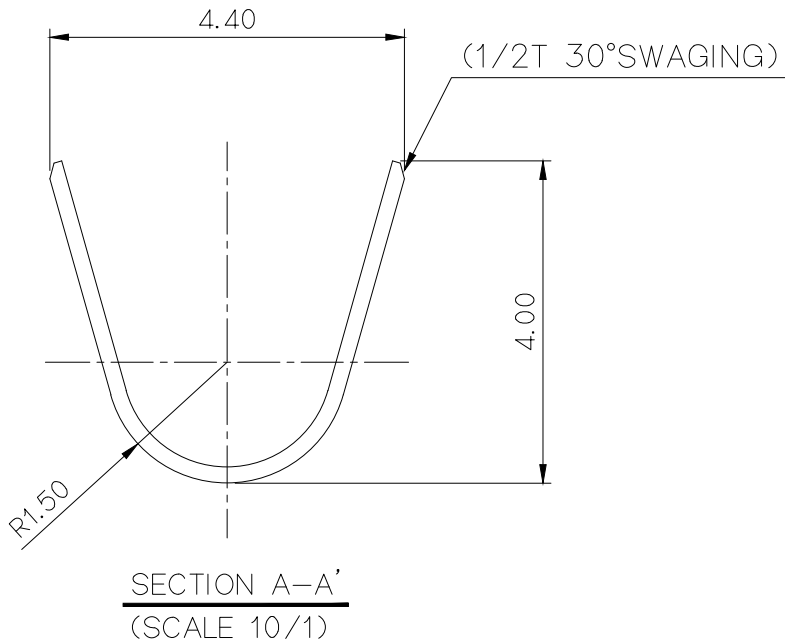
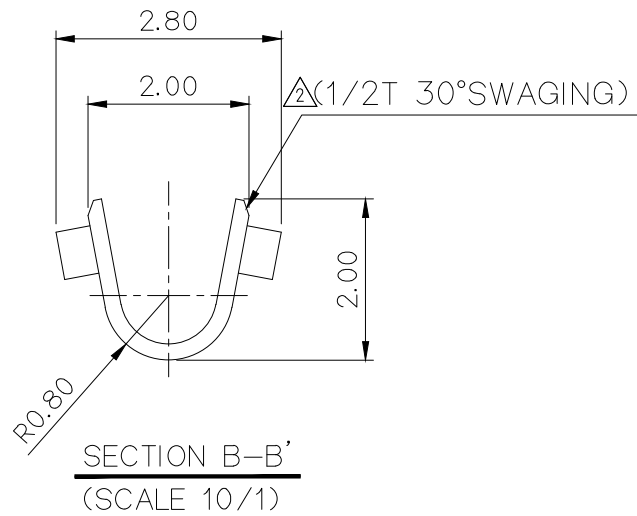
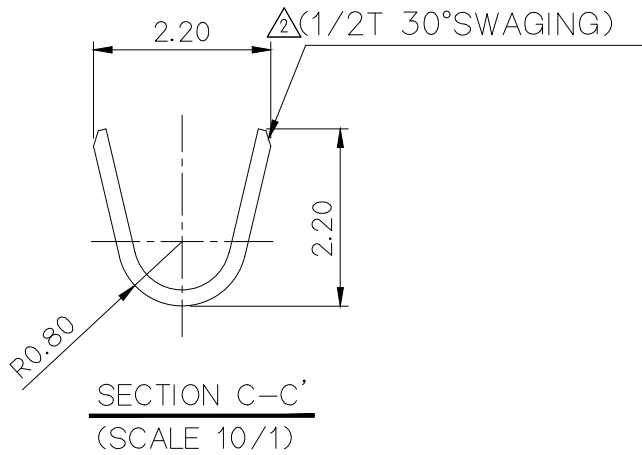
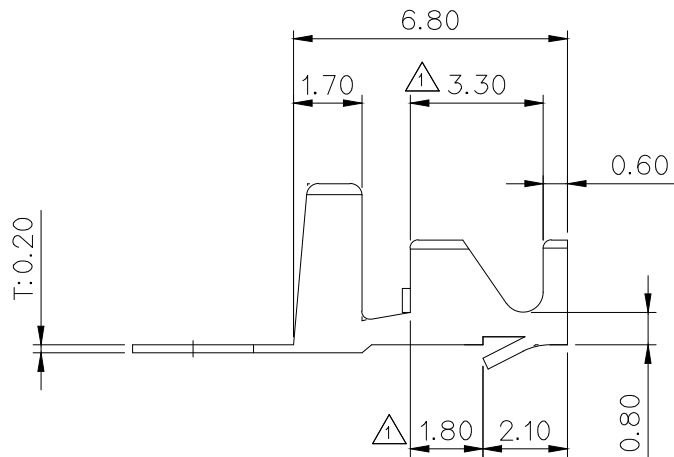


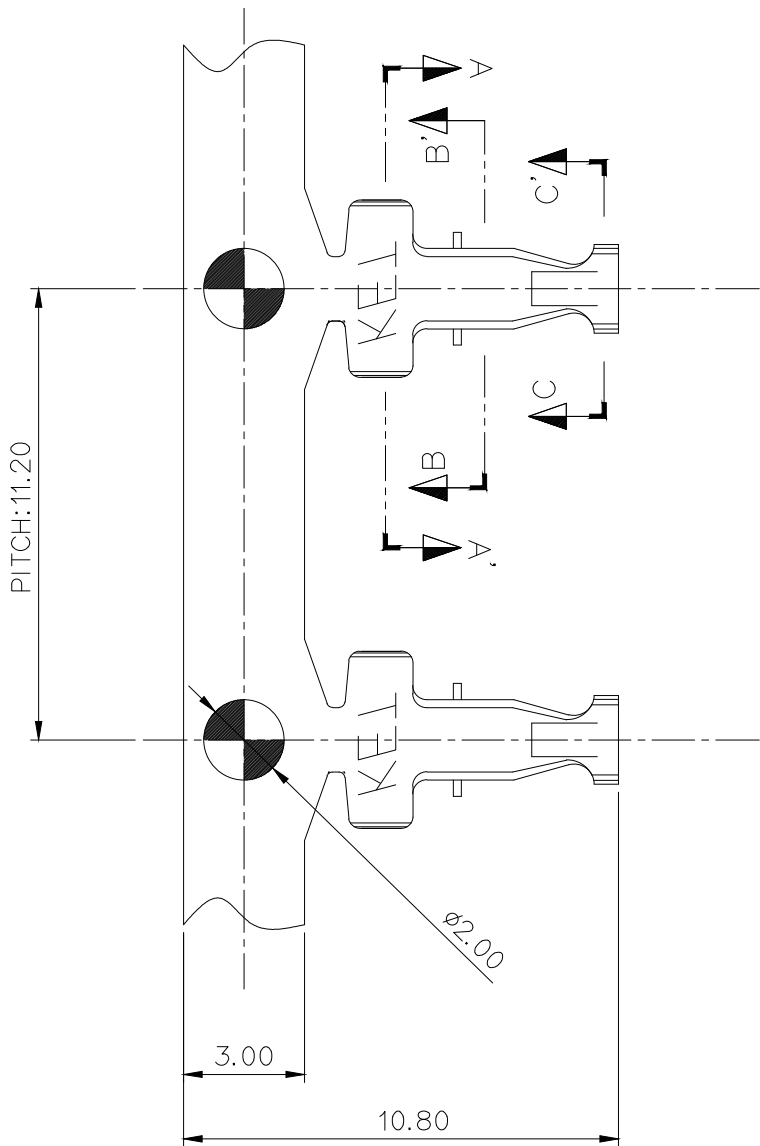

GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

- NOTE
- 적용기판 : $\phi 1.8\text{mm} \pm 0.1$ (구경) / PCB 두께 : $1.6\text{mm} \pm 0.1$
 - 지시없는 C&R=0.2-0.3 으로 한다.
 - 기능상 유해한 흠, 변형 및 BURR가 없을것
 - 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 ROHS 법규에서 지정한 최대허용 농도를 초과해서는 안된다.

- NOTE
- APPLICABLE BOARD : $\phi 1.8\text{mm} \pm 0.1$ / PCB THICKNESS : $1.6\text{mm} \pm 0.1$
 - UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.2-0.3 RADIUS.
 - MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
 - 6 HAZARDOUS SUBSTANCE IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED BY THE EU ELV DIRECTIVE & THE ROHS REGULATION..

APPROVED

2016-03-10

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Electronic Product Development Team

ISSUE MARK

						MATERIAL	BRASS	KET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	PRE-TIN	
						WIRE RANGE	22-18AWG	
2	ECO-1507-178근거 도면 제작성	SMG KSH	BUC	'15.07.20		INSULATION	2.5-2.9mm	CLASS
1	치수수정(삼성 요청 1곳)	HAN		'90.08.15				TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO. ST780487
DR.	* 06.15.90	CHK.	S.H HAN	90.06.16		PART NAME	PCB CONTACT TERMINAL	
CHK.	S. W K	APP.						