


PART NAME	PART NO	BALLEL SIZE	BALLEL DIMENSION												WIRE RANGE (mm ²)
			RW	R1	WW	W1	A1	A2	B	C	M	H	H1	H2	
LOW HEIGHT MINI FUSE TERMINAL-S	ST781033-3	S	0.4	1.1	2.4	3.9	3.0	1.3	5.4	17.8	(1.4)	1.05	3.5	2.9	AVS, AVSS 0.3 ~ 0.5
LOW HEIGHT MINI FUSE TERMINAL-M	ST781034-3	M	0.7	1.6	3.1	5.3	4.0	1.3	6.4	17.8	(1.3)	1.3	4.8	3.6	AVS, AVSS 0.85 ~ 1.25
LOW HEIGHT MINI FUSE TERMINAL-L	ST781035-3	L	0.7	1.9	4.1	6.4	4.0	1.3	6.4	17.8	(1.65)	1.3	5.66	4.94	AVS 2.0 ~ 3.0 / AVSS,AVSSXF 2.0
LOW HEIGHT MINI FUSE TERMINAL-L(N)	ST781341-3	L	0.7	1.9	4.1	6.4	3.6	1.6	6.7	18.1	(1.65)	1.3	5.66	4.94	△ AVSS 2.0 / AVSSXF 2.5 / AVS 3.0

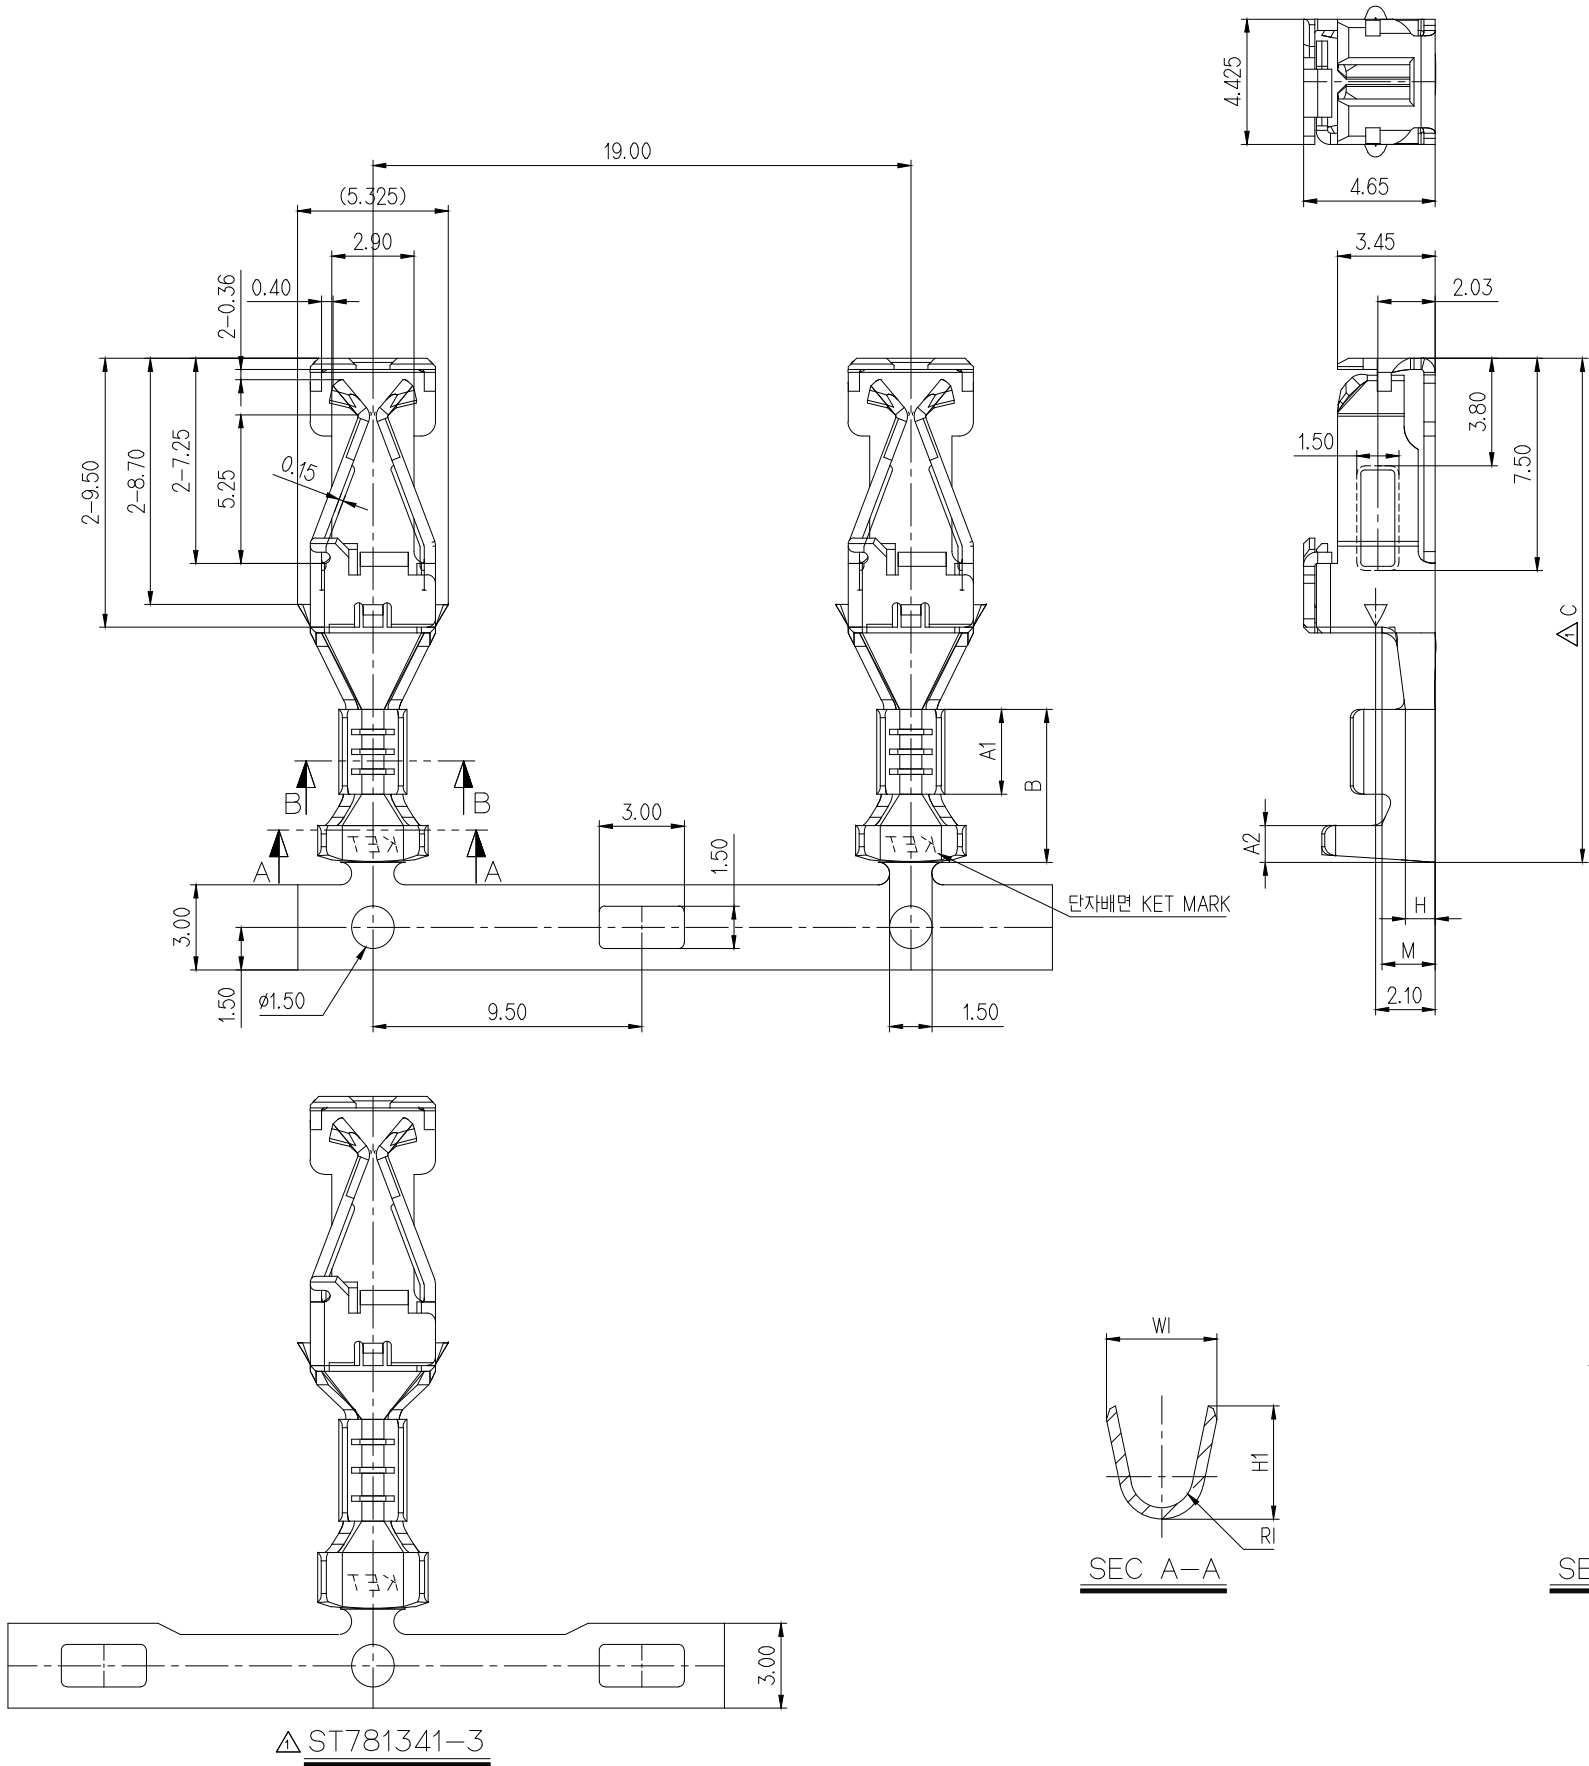

GENERAL TOLERANCE (TERMINAL)								USED ON
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	
Ⓑ	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	
C	±0.3	±0.5	±0.8	±4.1	±2	±30'	0.15	

1. FUSE 접촉면에 BURR 가 없을 것
2. 지시없는 각진 부분은 PRESS-R 적용 가능
3. HMC 요구사항 (LOW PROFILE MINI FUSE 사용)
 - 1) 삽입력: 5Kgf 이하
 - 2) 이탈력: 1.5 - 8.0 Kgf
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

1. SHALL BE FREE OF BURR AT FUSE MATING FACE
2. UNLESS OTHERWISE SPECIFIED ALL TO BE PRESS RADIUS.
3. HMC POSTULATE (USE LOW PROFILE MINI FUSE)
 - 1) ENGAGE FORCE: 5KgF or LESS
 - 2) RETENTION FORCE: 1.5 – 8.0 KgF
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

								APPROVED 2016-03-07 KOREA ELECTRIC TERMINAL CO., LTD. Korea Electric Te rminal Co., LTD.	
				DIE NO				ISSUE MARK	

						MATERIAL COPPER-ALLOY (10.40)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH PRE-TIN			
						WIRE RANGE SEE TABLE		CLASS 7126-8853-02 ETC	
						INSULATION SEE TABLE		TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 5/1	PART NO. SEE TABLE
DR.	CJH	'07. 12.27	CHK.	HSJ	'07.12.27				
CHK.			APP.	KKJ	'07.12.27	LOW HEIGHT MINI FUSE TERMINAL (S,M,L)			