

PART NO. MG634934


CUSTOMER DRAWING


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

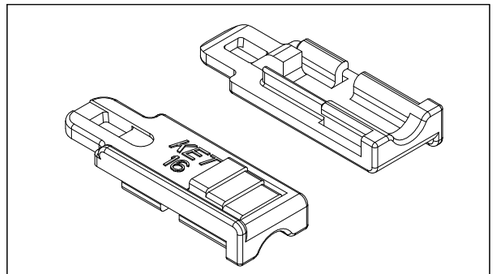



ISOMETRIC VIEW

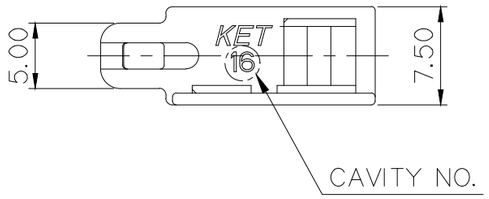

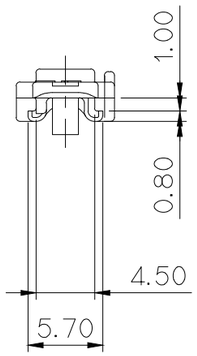

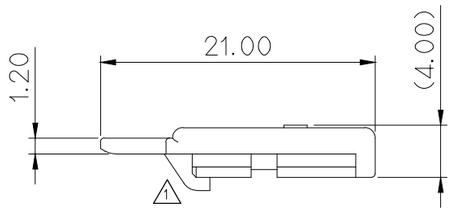



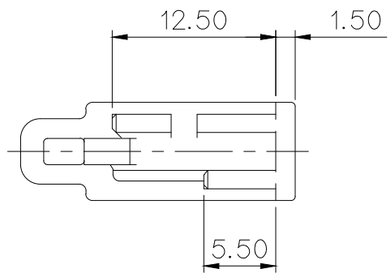

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPICABLE HOUSING : MG614933
⚠1 APPICABLE TERMINAL : ST731325-N
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
2.적용 HOUSING : MG614933
⚠1적용 TERMINAL : ST731325-N
3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

APPROVED
2016-03-07
KOREA ELECTRIC TERMINAL CO., LTD. Electronic Produc t Development Team

ISSUE MARK

⚠1	ECO-1203-361근거 도면 재작성	PJM	YSK	'12.03.22
LTR	REVISION RECORD	DR.	CHK. APP.	DATE

DR. P.J.M '09.10.01 CHK.
CHK. 10/1 APP. YSK 10/1

MATERIAL	PPS(V0)	KET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	BLACK		
WIRE RANGE		CLASS	
INSULATION		TYPE	내열 CONN'T
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	2/1
		PART NO.	MG634934
PART NAME	250 FLAG 1P REAR HOLDER (내열용)		

(DIMENSIONS IN MM)