
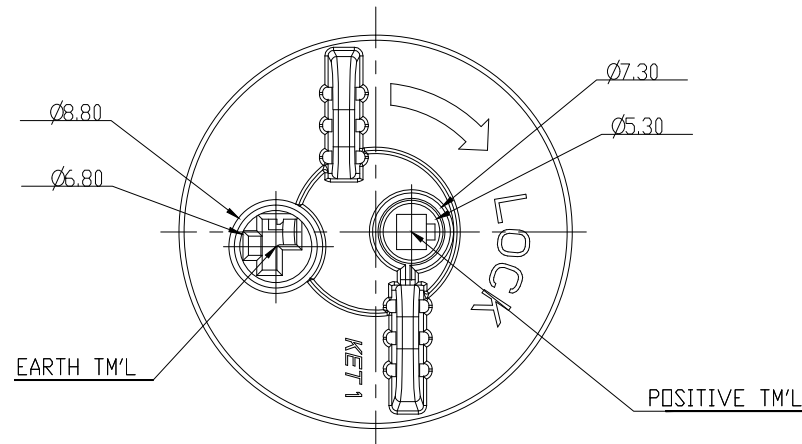
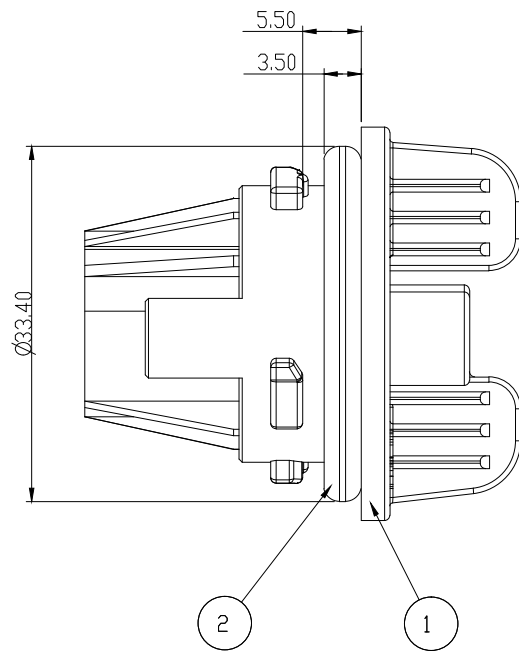
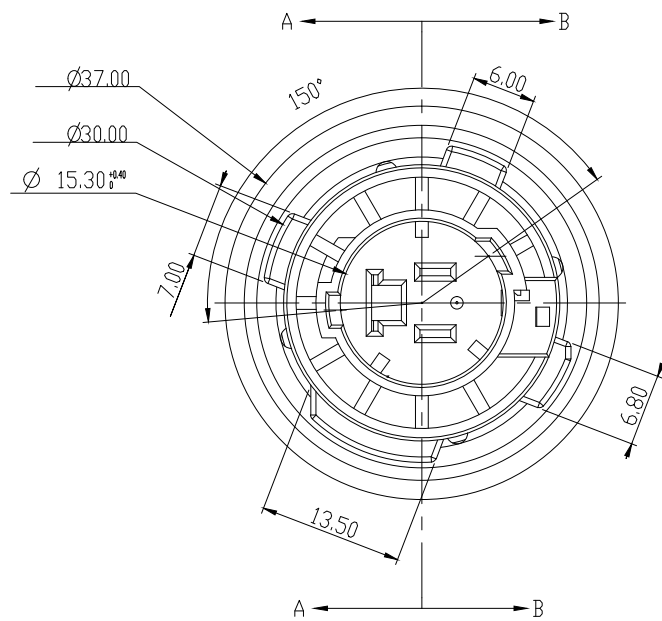
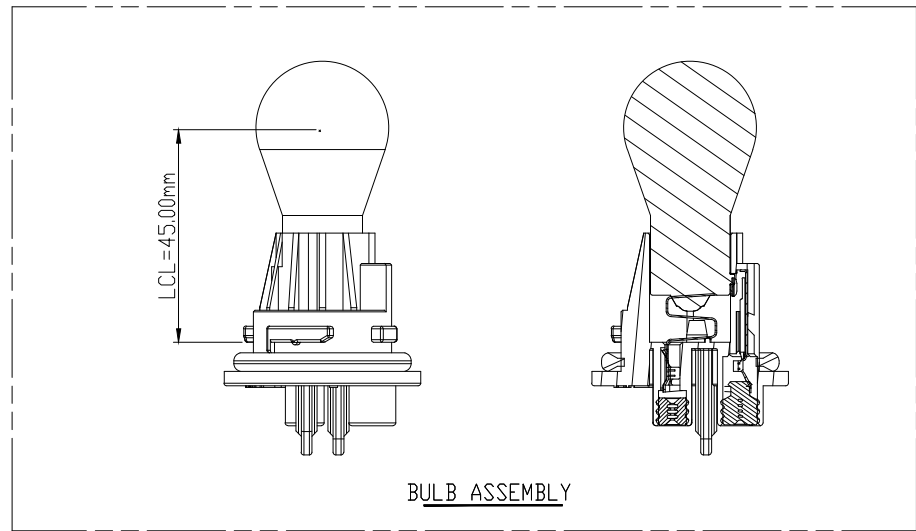
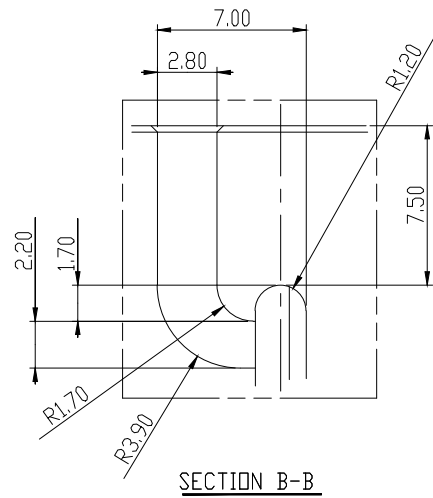
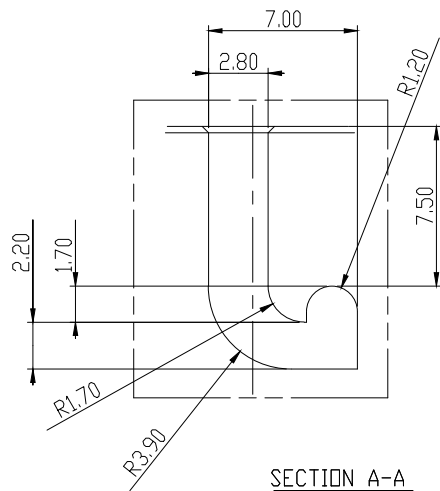


ISO VIEW

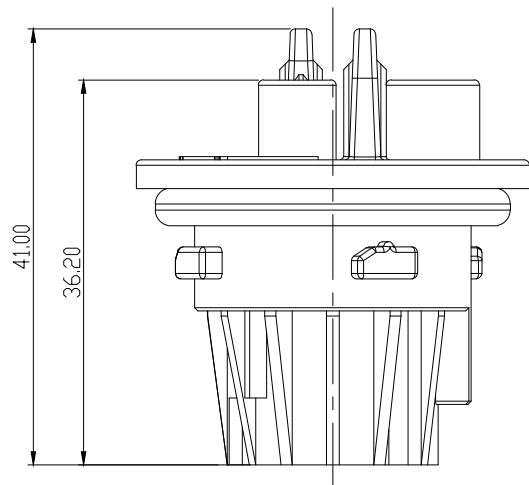

- 주 기
1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
 2. 적용 TERMINAL: ST781343-1(P), ST781344-1(E)
 3. 적용 GASKET SEAL: R600104
 4. 적용 WIRE SEAL: MG685413(P), MG685512(E)
 5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTE
1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 2. APPLICABLE TERMINAL: ST781343-1(P), ST781344-1(E)
 3. APPLICABLE GASKET SEAL: R600104
 4. APPLICABLE WIRE SEAL: MG685413(P), MG685512(E)
 5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO	PART NO	PART NAME	MATERIAL	FINISH
1	MG676697-41 (MG635814-41)	N-RCL BULB SOCKET(SINGLE 150±LCL45mm)	PA66+MF30%	L-GRAY
2	R600104	GASKET SEAL	SILICONE	BLACK



ISSUE MARK

					MATERIAL	SEE TABLE	KET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.			
					FINISH	SEE TABLE				
					WIRE RANGE INSULATION	CLASS				
	점시공작서 함격에 따른 도면 제작 시 (ECO-1704-027. 1704)			JHK	CHK	SUK	17.04.03	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG665853-41
	REVISION RECORD			DR	CHK	APP	DATE			
	LTR			DR	CHK	APP	DATE			
DR. NKT 16. 06. 07			CHK. KMH 16. 06. 10			PART_NAME N-RCL BULB SOCKET ASSY(SINGLE 150±LCL45mm)				
CHK.			APP. BIN 16. 06. 10							