

CUSTOMER DRAWING

PART NO. MG666017-5

GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30′	0.1	

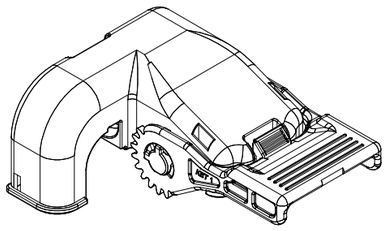


ISO VIEW
SCALE 1/2




<DELIVERY CONDITION>
(CLOSED LEVER)
SCALE 1/2


주기
1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 HOUSING: MG654648-5, MG654659-5, MG655735-5
3. 상측 표면 COVER GRAIN STYLE : HT86-100%
4. 제품내 함유된 10대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs,DHEP,DBP,BBP,DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE
1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING: MG654648-5, MG654659-5, MG655735-5
3. COVER SURFACE GRAIN STYLE : HT86-100%
4. 10 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs,DEHP, DBP,BBP,DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

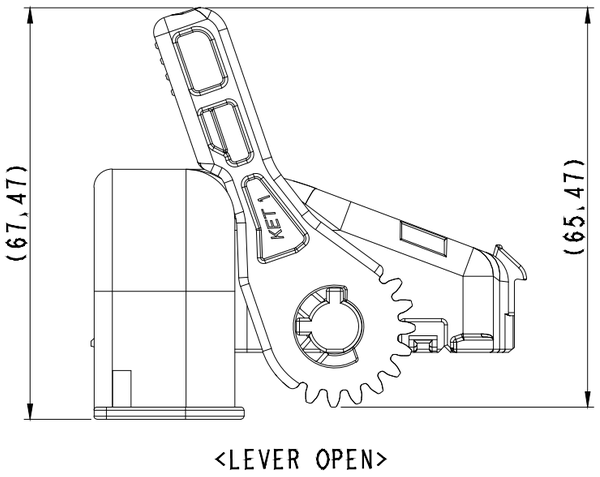


<LEVER OPEN>

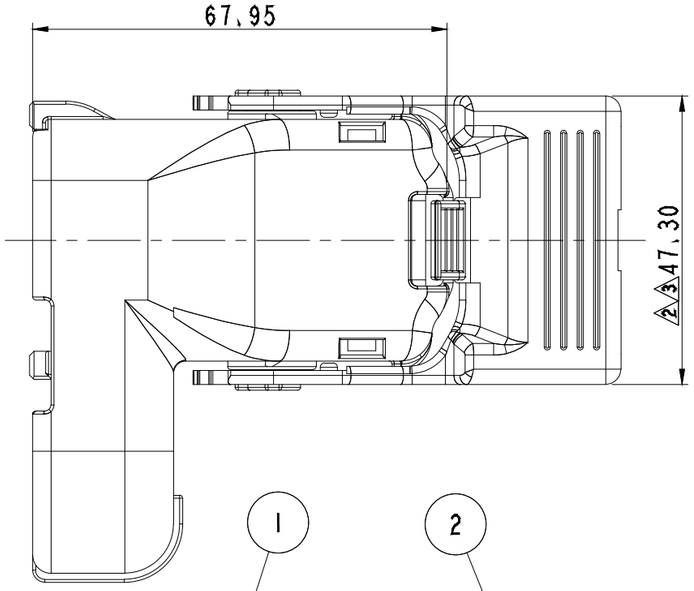


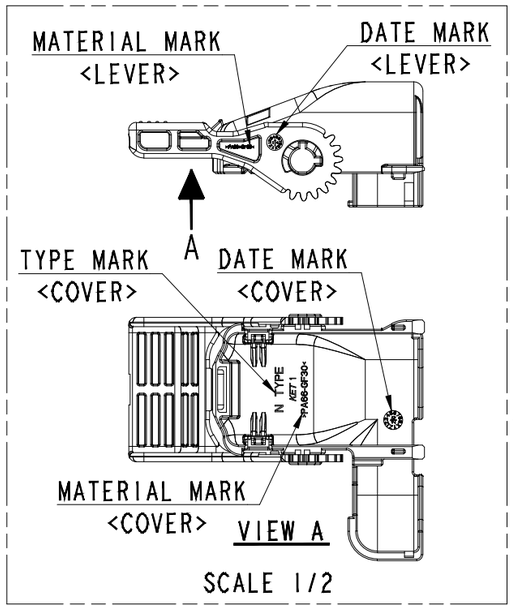


SCALE 1/2

NO.	MATERIAL	COLOR
0	PA66-GF30	NATURAL
1		RED
11		ORANGE
2		BULE
22		JADE
3		YELLOW
4		GRAY
41		LIGHT GRAY
42		DARK GRAY
5		BLACK
61		LIGHT GREEN
62		DARK GREEN
7		BROWN
9		MAGENTA

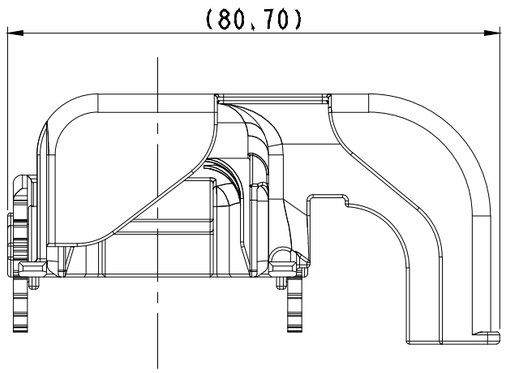

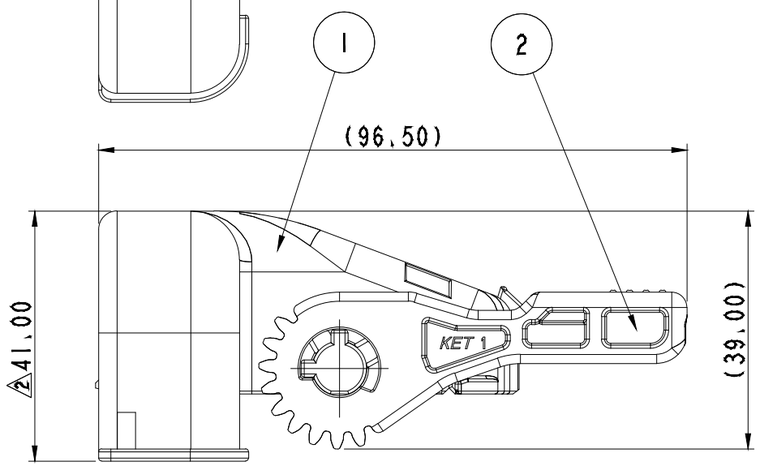

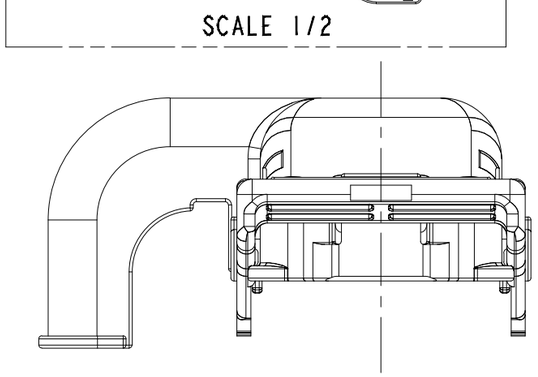

APPROVED
2021-10-25
KOREA ELECTRIC TERMINAL CO., LTD.
Korea Electric Terminal Co., LTD.

ISSUE MARK

3	ECO-2107-072 근거 도면 제작성	KJS	NKT	SSH	21.07.06
2	ECO-2103-406 근거 도면 제작성	KJS	NKT	SSH	21.03.30
1	ECO-2006-123 근거 도면 제작성 (작번 취소 포기)	KJS	NKT	SSH	20.06.15
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	KJS 2020.02.25	CHK.			
CHK.		APP.	SSH 2020.02.26		

MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.	
FINISH	SEE TABLE		
WIRE RANGE	-	CLASS	PCU/ECU
INSULATION	-	TYPE	-
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	1/1
PART_NAME	PCU/ECU 91F&105F COVER ASSY(N)	PART NO.	MG666017-5

NO.	PART NAME	PART NO	MATERIAL	COLOR	QTY
1	PCU/ECU 91F&105F COVER(N)	MG677673-5	PA66-GF30	BLACK	1
2	PCU/ECU 91F&105F LEVER(B)	MG675297-5	PA66-GF30	BLACK	1

(DIMENSIONS IN MM)