
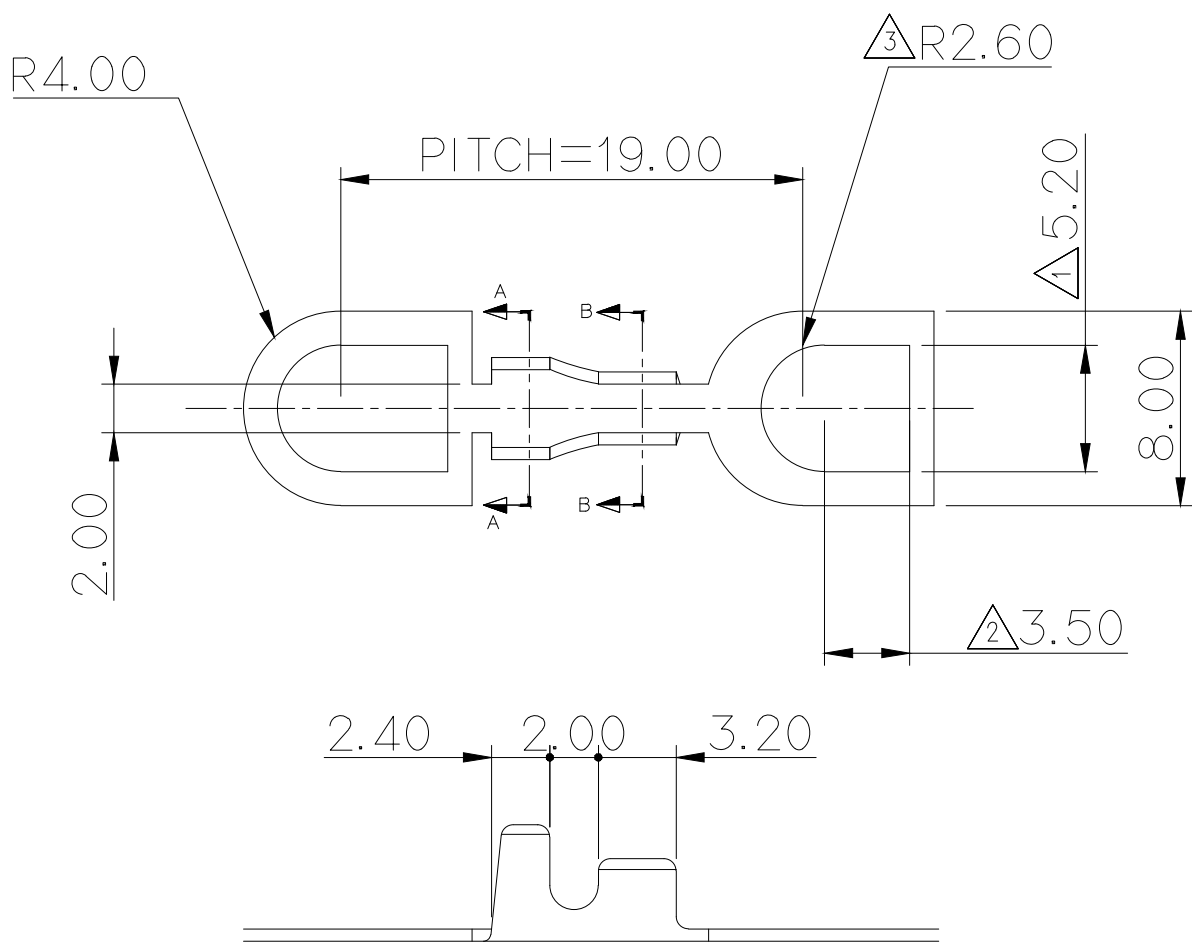
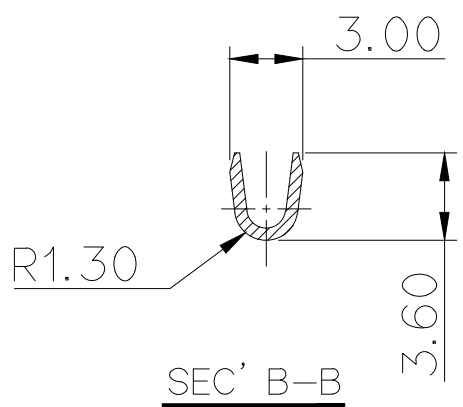


GENERAL TOLERANCE (TERMINAL)						USED ON
10MAX	50MAX	100MAX	250MAX	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.5	±30'	0.1	

NOTE

1. MUST BE FREE OF BURR, DEFORM AND IMPERFECTION THAT AFFECT FUNCTION.
2. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

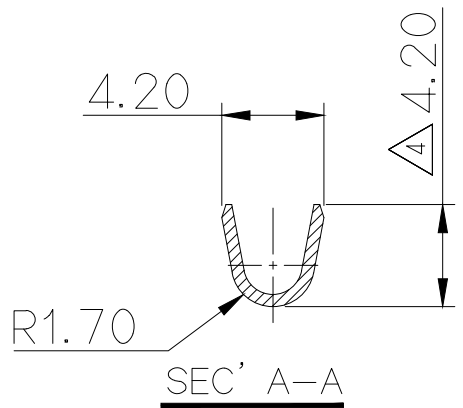

No	FINISH
1	BRASS
2	BRASS/TIN
3	PRE-TIN

주 기


1. 기능상 유해한 힘, 변형 및 BURR 등이 없을 것
2. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

APPROVED

2016-03-07

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

5	설계사양변경(S110128)근거 도면 재작성	DR. <i>KE</i>	APP. <i>KE</i>	'11.04.28	MATERIAL	BRASS	 KOREA ELECTRIC TERMINAL CO., LTD.	
4	4.7→4.2 제품에 의함	KE		'81.04.15	FINISH	SEE TABLE		
3	R2.1→2.6 변경	KE		'81.04.04	WIRE RANGE	CLASS		
2	4.0→3.5 변경	KE		'81.04.04	INSULATION	TYPE 200785		
1	4.2→5.2 변경	KE		'81.04.04				
LTR	REVISION RECORD	DR. / CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	PART NO.
DR. '77.06.07		CHK.			4/1		ST720007	
CHK.		APP. <i>KE</i> '77.06.08			PART NAME			
					SPADE TERMINAL (STRIP)			