
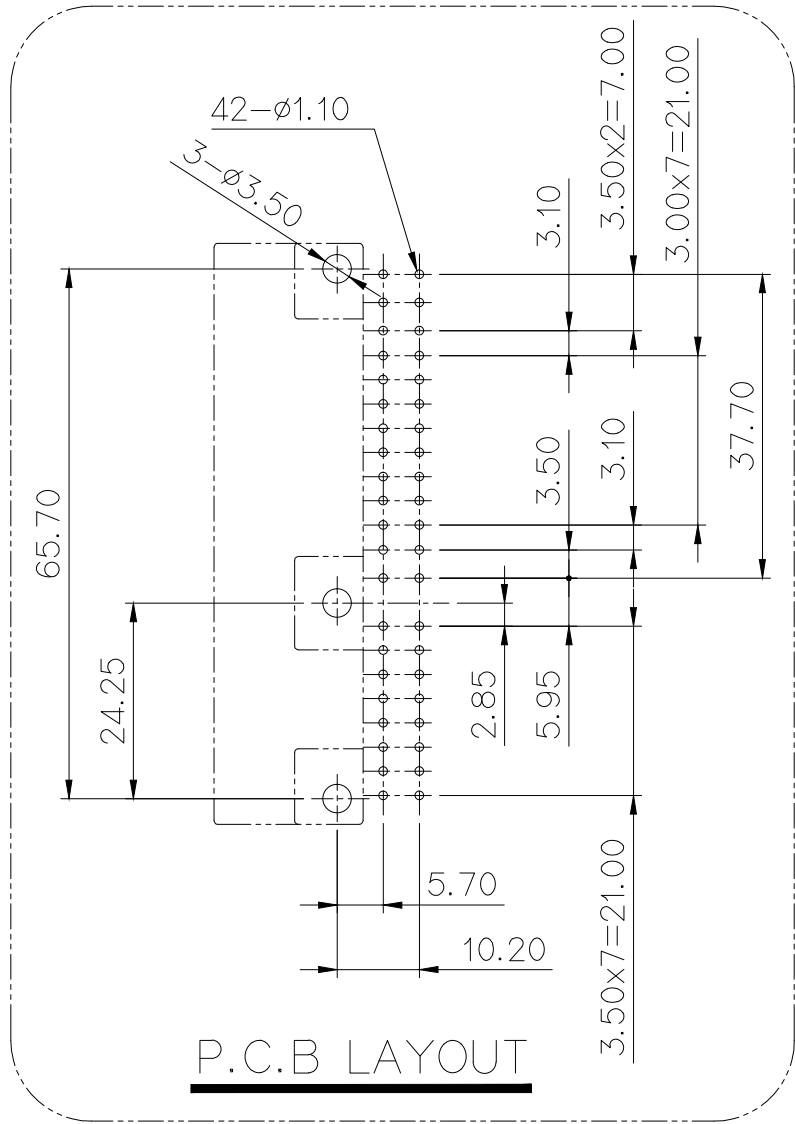
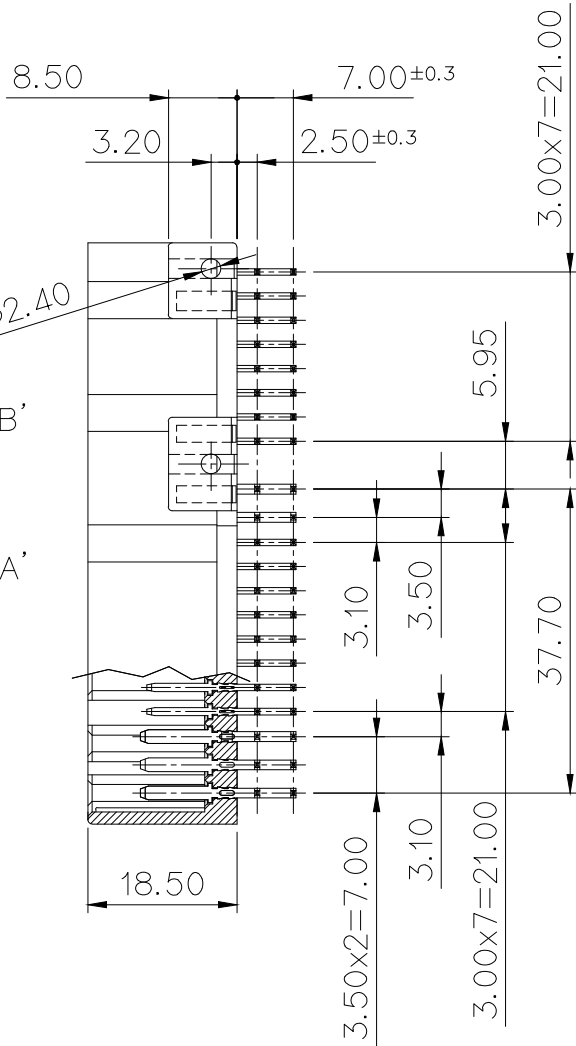
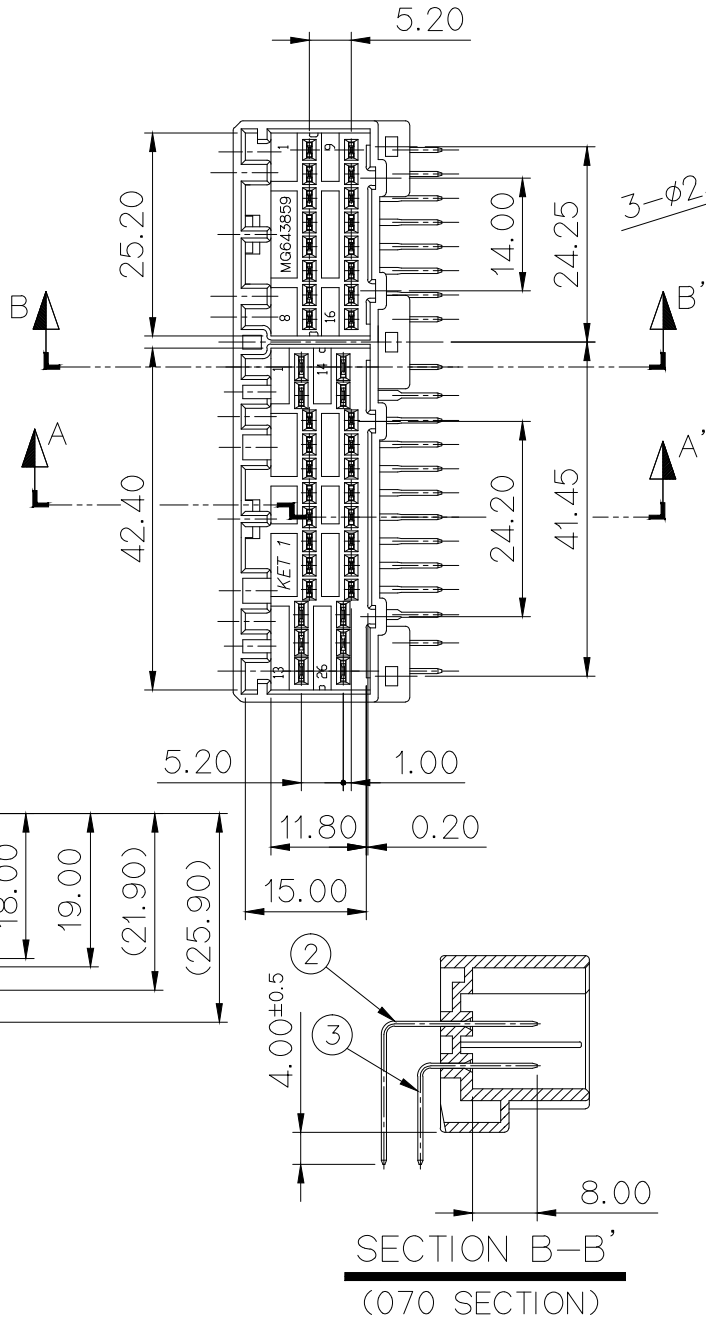
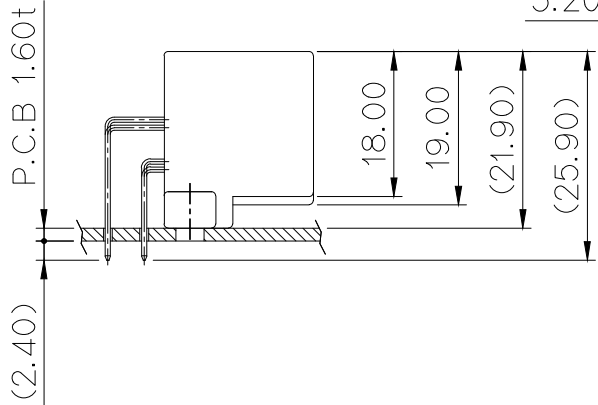


NO	PART NAME	MATERIAL	FINSH	Q'TY
①	0407 42M PCB HS'G (HZT)	—	—	1 EA
②	070 PCB MALE TM'L J/T (M)	BRASS	PRE-TIN	5 EA
③	070 PCB MALE TM'L J/T (S)	BRASS	PRE-TIN	5 EA
④	040 II PCB MALE TM'L J/T (M)	BRASS	PRE-TIN	16 EA
⑤	040 II PCB MALE TM'L J/T (S)	BRASS	PRE-TIN	16 EA

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)								USED ON	
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT			
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1			

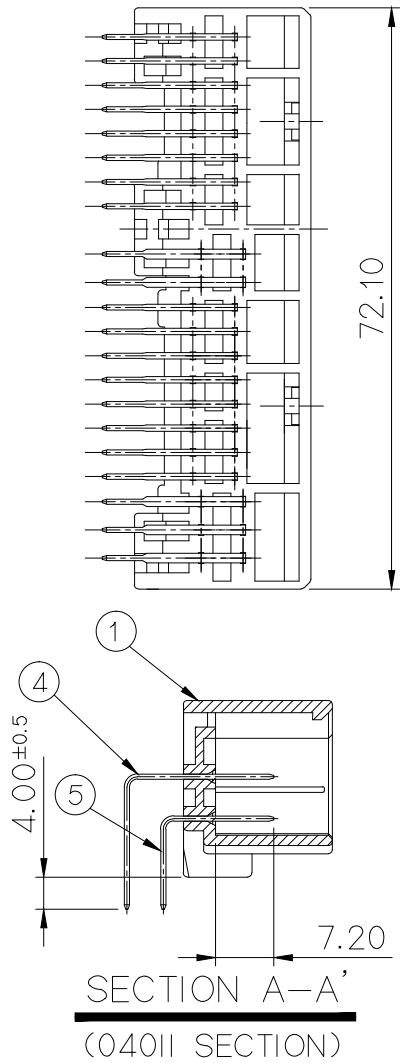


NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE FEMALE HS'G: MG611336 (26P), MG611332 (16P)
5. APPLICABLE MOUNTING SCREW : M3 SCREW
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

△	NO.	MATERIAL	COLOR
*	0	P B T G/F 30%	NATURAL
	1		RED
	2		BLUE
	20		JADE
	3		YELLOW
	4		GRAY
	40		DARK GRAY
	41		LIGHT GRAY
*	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

주 기

- 1.지시하지 않은 반경 R은 0.5로 한다
- 2.지시하지 않은 모따기 C는 0.5으로 한다.
- 3.기능상 유해한 FLASH, WELDLINE, 결함 등이 없을 것.
- 4.적용 FEMALE HS'G: MG611336 (26P), MG611332 (16P)
- 5.적용 SCREW : M3 일반나사
- 6.제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		SEE TABLE		
						WIRE RANGE		CLASS		HYBRIDE
						INSULATION		TYPE		.040 .070
	ECO-2109-038 근거 도면 재작성		KSC	-	HYJ	21.09.03	TOLERANCE EXCEPT AS NOTED		SCALE	PART NO.
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	SEE TABLE	1/1	MG643859	
DR.		YSW '06.12.22	CHK.	HSJ	12/22		PART NAME			
CHK.			APP.	KKJ	12/22		0407 42M PCB ASSY (HZT)			

APPROVED

2021-10-20

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK