

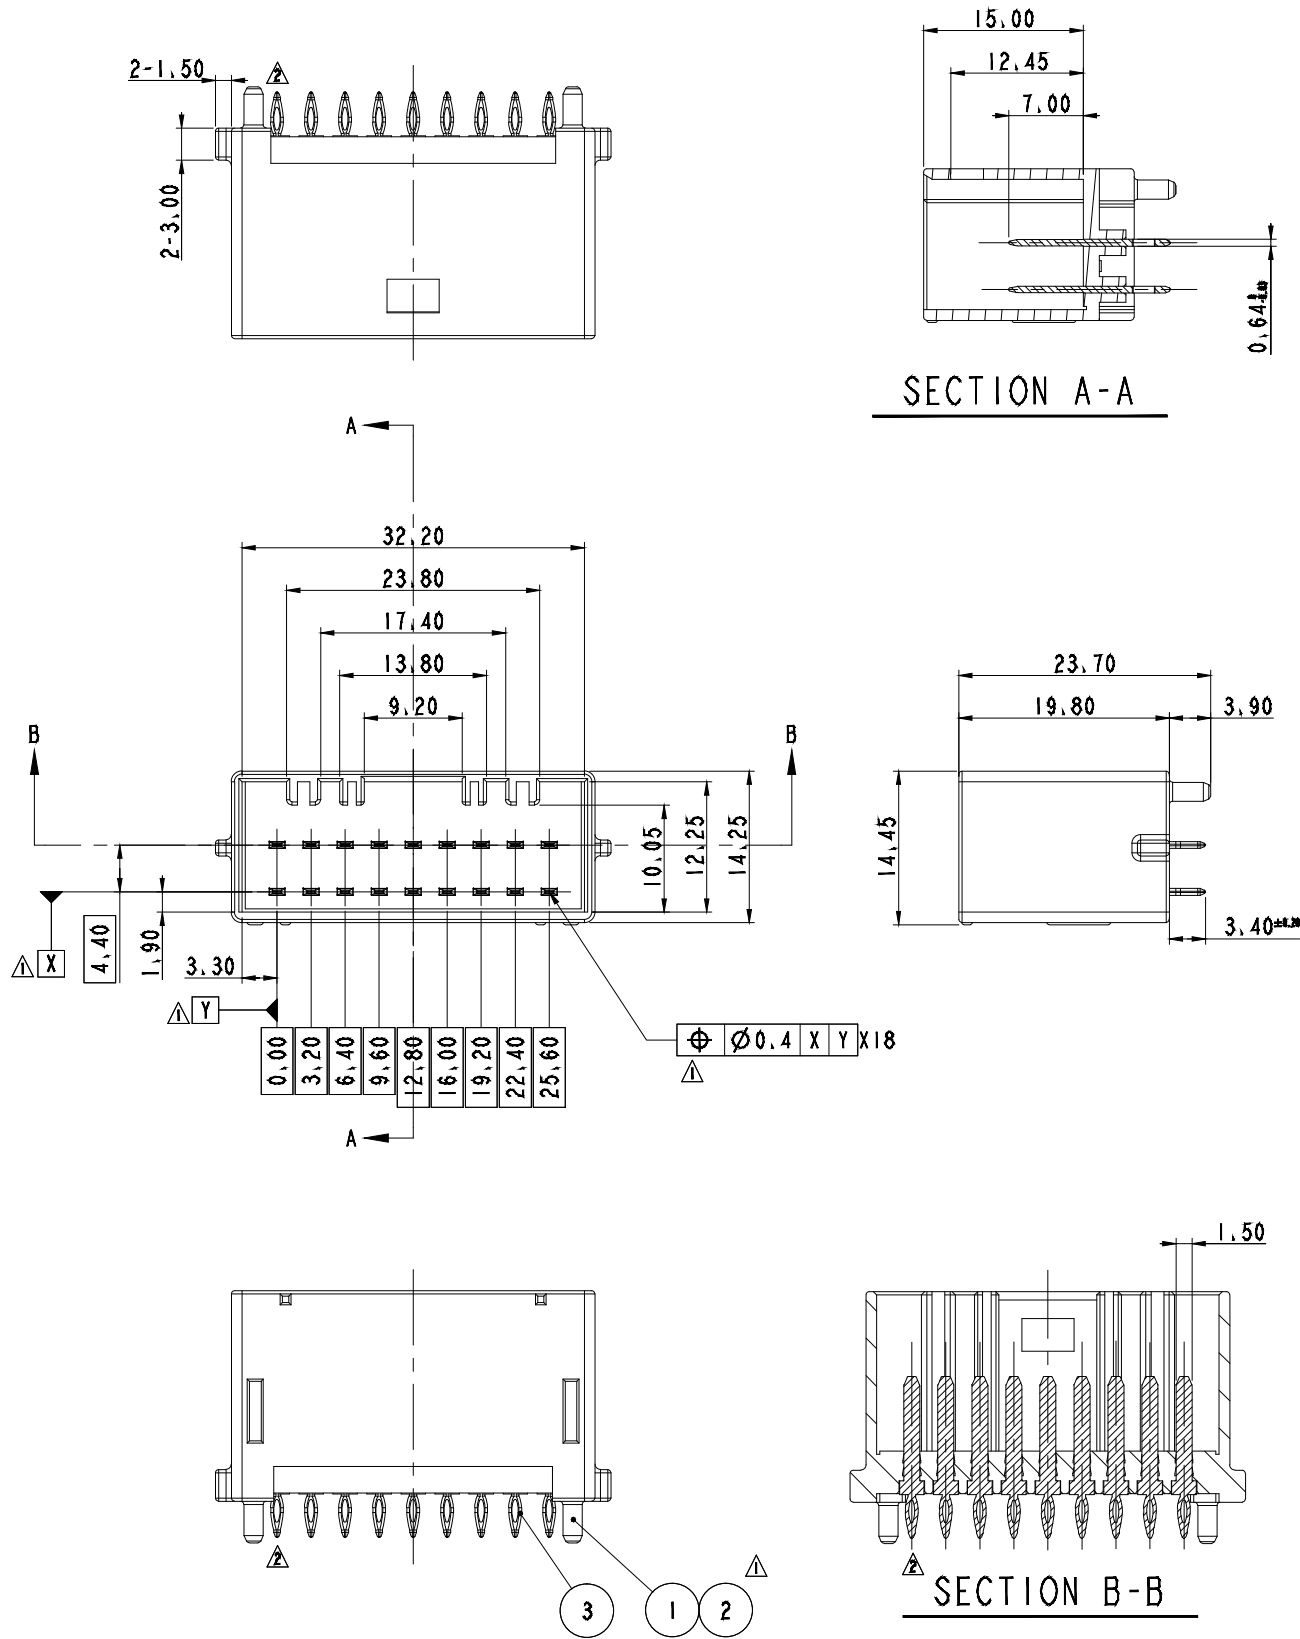


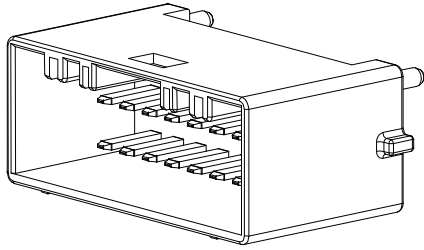

NO	PART NAME	PART NO	MATERIAL	FINISH	QTY	
					MG646094	MG646165-4
1	060 18M PRESS-FIT HOUSING	MG676891	NATURAL	SEE TABLE	1	
2	060 18M PRESS-FIT HOUSING	MG677089	GRAY			1
3	060 PRESS-FIT MALE TERMINAL	ST793371-2	COPPER ALLOY	Sn 후도금 (Reflow)	18	10

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	20 MAX	45 MAX	ANGLE	ECCENT	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

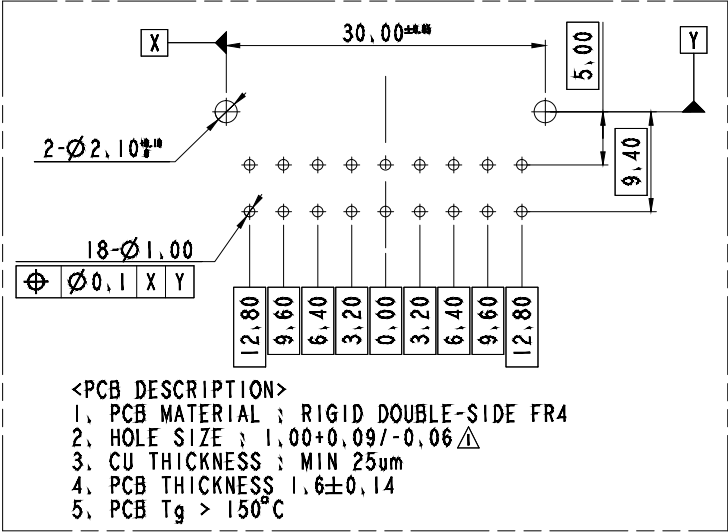

ISO VIEW

- 주요
1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2. 적용 FEMALE HOUSING : MG655829
3. TERMINAL 도금 사양 : TYPE A Sn(무광택), (MS915-01)
Ni 하지 도금 + Sn(무광) + Reflow
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- NOTE
1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION,
2. APPLICABLE FEMALE HOUSING : MG655829
3. TERMINAL PLATING SPECIFICATION : TYPE A Sn(MATTE), (MS915-01)
Ni-PLATED UNDER + Sn(MATT) + Reflow
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

적용 PIN 사양			
060 18M PRESS FIT ASSY (18PIN)		060 18M PRESS FIT ASSY (10PIN)	
PART NO	MG646094	PART NO	MG646165-4

NO.	MATERIAL	COLOR
0	PBT-GF30	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE



ISSUE MARK

				MATERIAL	SEE TABLE		KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	SEE TABLE		
				WIRE RANGE	-	CLASS	060
				INSULATION	-	TYPE	PRESS-FIT
				SEE TABLE	SCALE 2/1	PART NO.	MG646094
				PART-NAME	060 18M PRESS-FIT ASSY		