




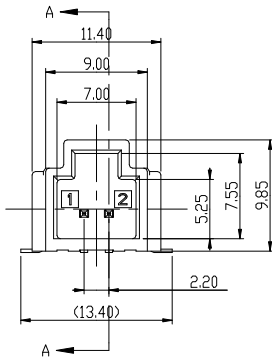


ISO VIEW



GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	20 MAX	45 MAX	ANGLE	ECCENT	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

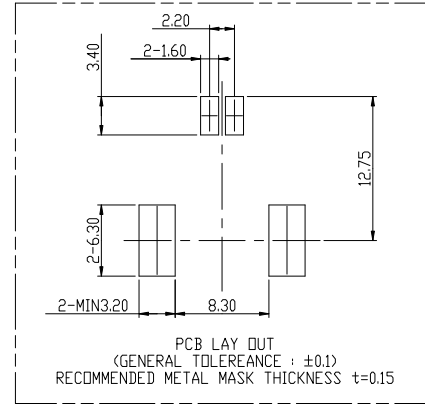

- ??
1. ??? ??? BURR ? WELDLINE ?? ?? ?.
2. ?? FEMALE HOUSING : MG657063
3. ?? ?? ?? - TYPE A Sn(??), (MS915-01)
Ni ?? ?? + Sn(??) + Reflow
4. ??? ??? 10? ??? (???,???,6???,
PBBs,PBDEs, DHEP, DBP, BBP, DIBP)? EU ELV ??
? RoHS ??? ? ? ? ? ? ? ? ? ? ?.

- NOTE
1. MUST BE FREE OF FLASH, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE FEMALE HOUSING: MG657063
3. TIN-PLATED TERMINAL - TYPE A Sn(MATT), (MS915-01)
Ni PLATED UNDER + Sn(MATT) + Reflow
4. 10 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,
CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs, PBDEs,
DHEP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM
PERMISSIBLE CONCENTRATION PRESCRIBED UNDER
EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PPS-GF40	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

ISSUE MARK

NO	PART NAME	PART NO	MATERIAL	FINISH	QTY
1	025 2M SMD HOUSING (HZT)	MG677747	SEE TABLE	SEE TABLE	1EA
2	025 SMD MALE TERMINAL	ST792602-2	BRASS	Sn ???(??)-Reflow	2EA
3	025 SIDE BRACKET	ST793450-2	BRASS	Sn ???(??)	2EA

					MATERIAL	SEE TABLE	KET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE	CLASS	
					INSULATION	TYPE	
LTR	REVISION RECORD	DR	CHK	APP	DATE	SCALE	PART NO.
	DR: KCS 2020. 05.25	CHK:			REWORK AT MFG	3/1	MG646432
	CHK: YSW 2020.5.25	APP: SSH	2020.5.25		PART NAME	025 2M SMD ASSY(HZT)	