


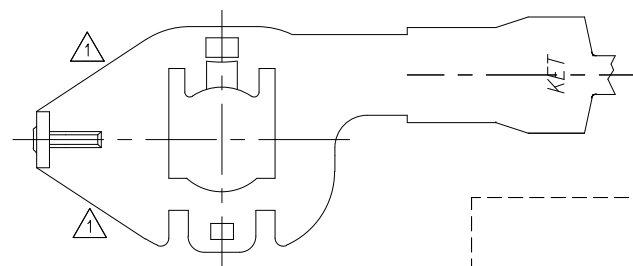
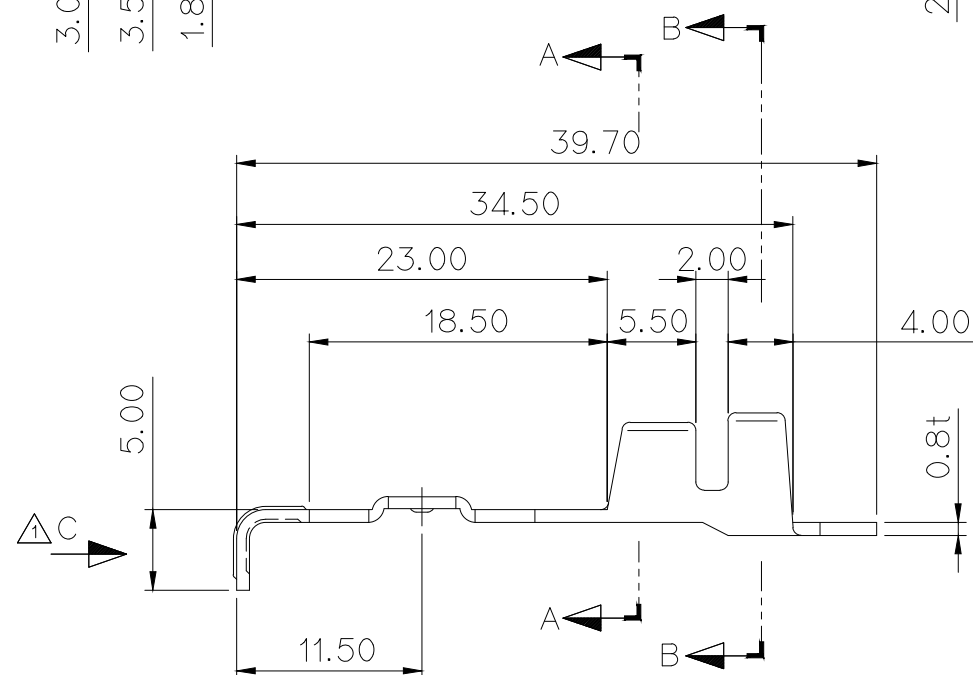


GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	


NO	PART NO	BARREL SIZE	WIRE BARREL SIZE			INSUL. BARREL SIZE			WIRE RANGE (mm ²)	FINISH
			W1	H1	R1	W2	H2	R2		
1	ST710966-1	S	5.0	4.0	2.0	7.4	5.8	2.8	AVS0.5, 0.5X2, 0.85	UNPLATE
2	ST710966-3								AVS1.25 AVS0.5+0.85 AVS0.5X2 AVSS 0.5~1.25	PRE-TIN
3	ST710952-1	M	6.0	5.0	2.3	8.2	6.8	3.0	AVS2.0, 1.25X2	UNPLATE
4	ST710952-3								AVS0.5+1.25, 0.5+2.0 AVS0.85+2.0 AVSS 2.0	PRE-TIN
5	ST710967-1	L	7.0	6.6	3.0	8.0	7.8	3.5	AEXF(AEX)5.0,8.0	UNPLATE
6	ST710967-3								AVS5.0,8.0	PRE-TIN

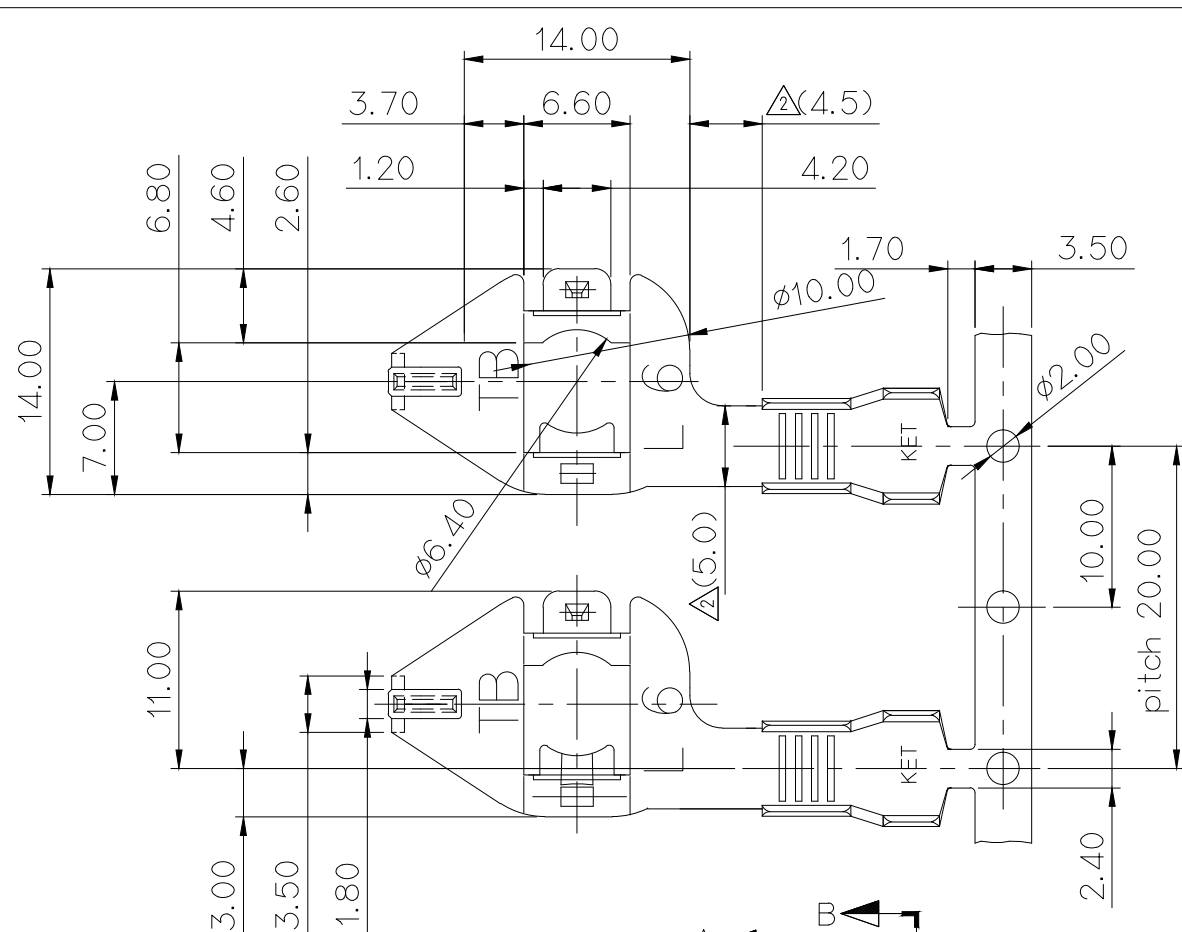


SECTION B-B

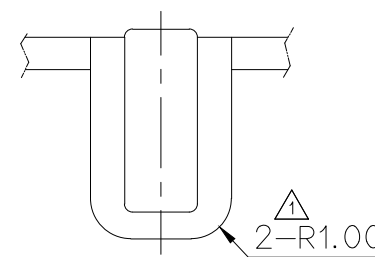

VIEW D
(S=5/1)



SECTION A-A

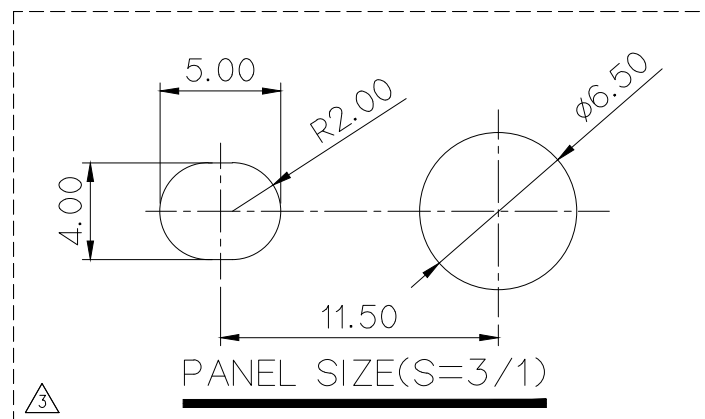

PANEL SIZE(S=3/1)

주 기

1. 표시없는 "R"은 전부 0.5으로할것.
2. 기능상 유해한 BURR, 변형등이 없을것.
3. 적용EARTH TM'L 제품:
ST710953,964,965 RH TYPE
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.5 RADIUS.
2. MUST BE FREE OF BURR,WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL : ST710953,964,965 RH TYPE
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL	BRASS	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	SEE TABLE	
3	ECO-1206-022 큰거 도면변경	HSR			'12.06.08			
2	실개시양변경(S10031)큰거 도면 재작성	LHS	—	—	'10.12.03			
1	실개시양변경(S060332)큰거 도면재작성 (STOPPER 형상변경)	KBS	—	—	'06.12.12			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. ST710966,952,967
DR.	HEO 04.03.22	CHK.	—	3/22		PART NAME		
CHK.		APP.	—	3/22		ø6.4 EARTH RING TM'L(LH-TB)-STOPPER(S)(M)(L)		