
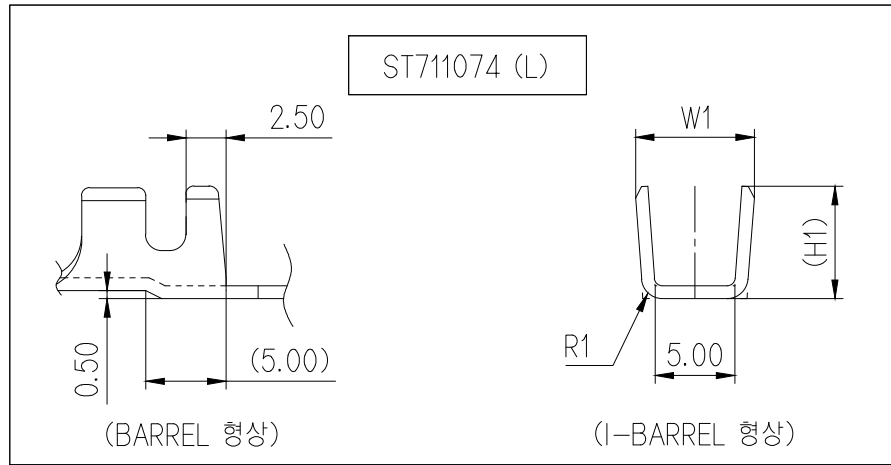
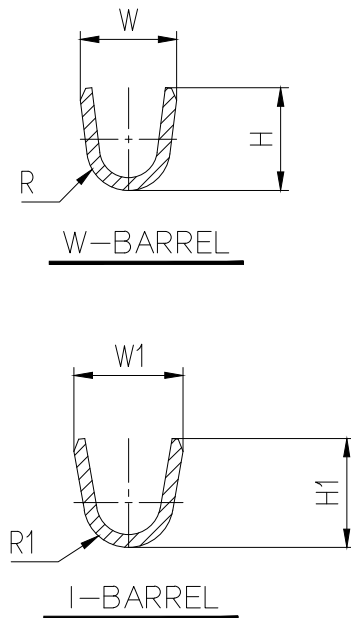


NO	PART NO	BARREL SIZE	WIRE BARREL SIZE			INSUL. BARREL SIZE			WIRE RANGE (mm ²)	FINISH	MATERIAL
			R	H	W	R1	H1	W1			
1	ST711074-3	L	2.60	(6.30)	6.40	1.50	(7.15)	7.40	FLRY 4.0 – 6.0 FLRY 1.5 X 3 WIRE FLRY 1.5 X 4 WIRE	PRE-TIN	BRASS 0.80t
2	ST711075-3	M	2.20	(5.00)	5.70	3.00	(6.10)	7.20	FLRY 2.5 FLRY 1.5 X 2 WIRE		
3	ST711076-3	S	2.20	(4.00)	5.00	2.20	(4.80)	5.00	FLRY 0.5 – 1.5		

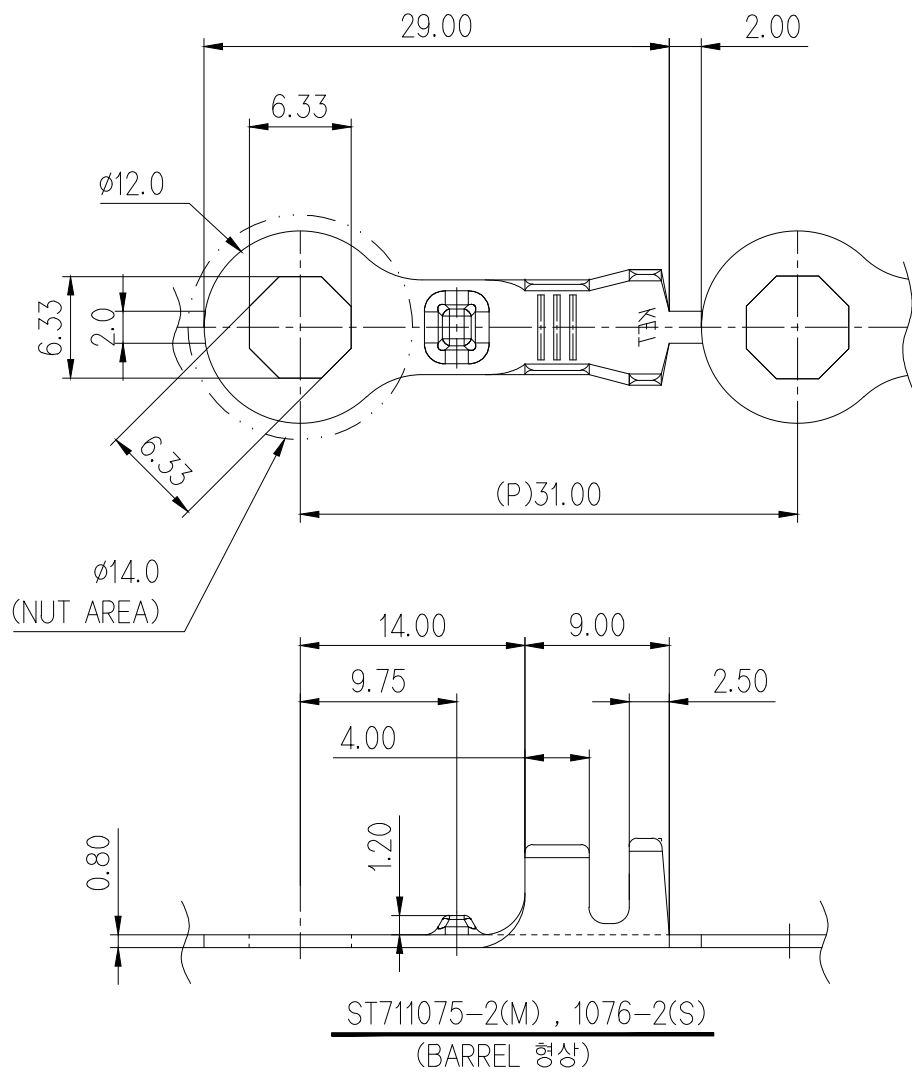

GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

주 기

1. 지시없는 C,R=0.30으로 한다.
2. 적용전선 : SEE TABLE
3. 제품기능상 유해한 BURR, CRACK 등이 없을것.
4. KET MARK는 INSULATION BARREL에 MARKING한다.
5. KET 문자 : ㄴ TYPE, 기울기 15° (문자높이;0.1-0.2, SIZE;1.0)
- 6.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL CHAMFER, RADII TO BE 0.3
2. APPLICABLE WIRES : SEE TABLE
3. MUST BE FREE OF BURR, CRACK
AND IMPERFECTION THAT AFFECT FUNCTION.
4. KET SHALL BE MARK ON INSULATION BARREL.
5. KET MARK : □ TYPE, TAPER 15° (H; 0.1–0.2, SIZE; 1.0)
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,
CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION.

A rectangular stamp with a black border. It is divided into three horizontal sections. The top section contains the word "APPROVED" in bold, black, sans-serif capital letters. The middle section contains the date "2016-02-16" in bold, black, sans-serif capital letters. The bottom section contains the text "KOREA ELECTRIC TERMINAL CO., LTD." in bold, black, sans-serif capital letters, followed by "Product Development Team 1" in a smaller, regular, black, sans-serif font.

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH SEE TABLE		
					WIRE RANGE SEE TABLE		
					INSULATION		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE SCALE 2/1 PART NO. ST711074-3 (L) ST711075-3 (M), ST711076-3 (S)
DR.	KMH	'08. 07.03	CHK.				PART NAME 팔각 EARTH RING TERMINAL (29mm)
CHK.	HSH	'08.07.03	APP. KKJ			'08.07.03	