CUSTOMER DRAWING

PART NO. ST740686, 687, 688

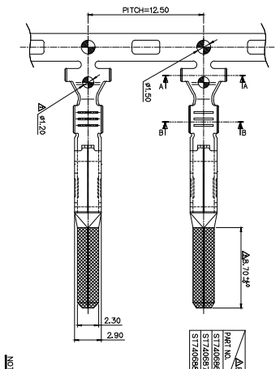

GENERAL TOLERANCE (TERMINAL)				USED ON
50MAX	100MAX	250MAX	ANGLE	ECCENT
±0.20	±0.30	±0.50	±30°	0.10

PART NO.	WIRE BARREL			INSULATION BARREL			WIRE RANGE (mm²)
	W1	H1	R/W	W2	H2	R/I	
ST740686 (G)	2.4	2.3	0.8	6.0	4.9	2.2	AVSS(CAVS) 0.3~0.5
ST740687 (U)	2.9	2.9	1.0	6.0	4.9	2.2	AVSS(CAVS) 0.85~1.25
ST740688 (U)	3.6	3.8	1.2	6.0	4.9	2.2	AVSS 2.0



NOTE

1. 端子材料: 黄銅板 表面処理: 錫めっき
2. 対象 WIRE SEAL: MC688050, 689050-4, 690749 – DL 030WP 2P
   MC688114, 689115, 689116 – 090N WP SERIES

5	2004. 06. 24								
4	2003. 05. 21								
3	2002. 04. 26								
2	2001. 03. 27								
1	2000. 12. 15								
REV	DATE	DRAWN	CHECKED	APPD	DESCRIPTION	REV	DATE	DRAWN	CHECKED
5	2004. 06. 24				ST740686-0 – 2P2B WIRE SEAL 0.3sq(AVSS 0.3sq)				
4	2003. 05. 21				ST740686-3 – 2P4B WIRE SEAL 0.5sq(AVSS 0.5sq)				
3	2002. 04. 26				ST740687-3 – 1P4B WIRE SEAL 1.25sq(AVSS 1.25sq)				
2	2001. 03. 27				ST740688-3 – 1P4B WIRE SEAL 2.0sq(AVSS 2.0sq)				
1	2000. 12. 15								

DRAWN	2000. 12. 15	MATERIAL	BRASS
CHECKED		FINISH	SEE TABLE
APPD		SCALE	SEE TABLE
DATE	2000. 12. 15	SHEET	1/1
REF.		PART NO.	ST740686/687/688

KEL CORPORATION

TITLE: .090N SEALED

TYPE: 1P4B TERMINAL

ISSUE MARK



DRAWN	WON. 96.4.15	CODE	—
CHK.		APP.	----

SCALE	8/8
SHEET	8/8

APPROVED
2016-05-11
Hideaki Ito
Hideaki Ito
Hideaki Ito
Hideaki Ito